


DUAL ROW HEADER 2.54*2.54mm SERIES

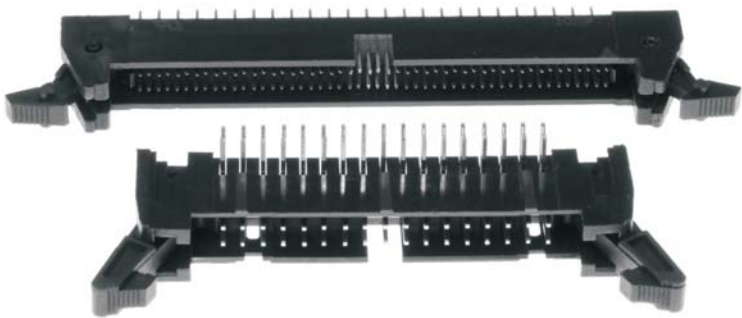

Material & finish

PIN CONTACT:

Cooper
Alloy

INSULATOR:

PBT & Glass-fibre
reinforced UL 94-V0

OPERATING TEMPERATURE:

-40°C to +105°C

CURRENT RATING:

1 Amp

CONTACT RESISTANCE:


15 milliohms MAX.

INSULATOR RESISTANCE:

1000 Megohms Min.

VOLTAGE RATING:

250VAC. R.M.S.

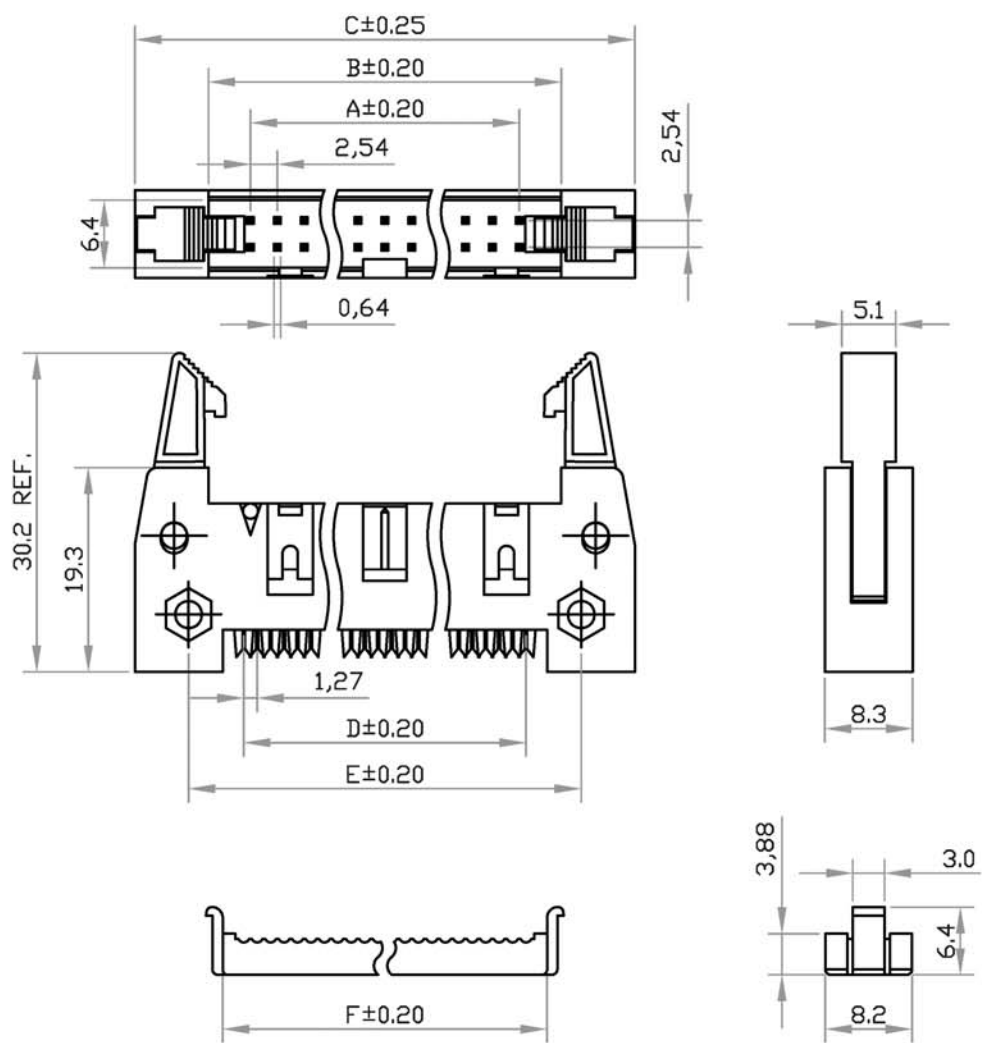

Pos.	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F
10	10.16	18.10	32.00	11.43	21.86	15.42
14	15.24	23.18	37.08	16.51	26.94	20.50
16	17.78	25.72	39.62	19.05	29.48	23.04
20	22.86	30.80	44.70	24.13	34.56	28.12
24	27.94	35.88	49.78	29.21	39.64	33.20
26	30.48	38.42	52.32	31.75	42.18	35.74
30	35.56	43.50	57.40	36.83	47.26	40.82
34	40.64	48.58	62.48	41.91	52.34	45.90
40	48.26	56.20	70.10	49.53	59.96	53.52
50	60.96	68.90	82.80	62.23	72.66	66.22
60	73.66	81.60	95.50	74.93	85.36	78.92
64	78.74	86.68	100.58	80.01	90.44	84.00

Board to Board

ORDERING INFORMATION

UH1 - XX F K B X X 0 0

TYPE

UH1: 2.54mm*2.54mm

No. OF CONTACTS

10~64

LAYOUT TYPE

F: IDC FLAT CABLE
TYPE

INSULATOR COLOR

K: BLACK

LATCH TYPE

A: LONG LATCH
B: SHORT LATCH

CONTACT PLATING

B: GOLD FLASH

P.C.B CONTACT LENGTH

F: 3.4mm
G: 4.0mm