


CENTRONIC 2.16mm P.C.B. STRAIGHT SMT

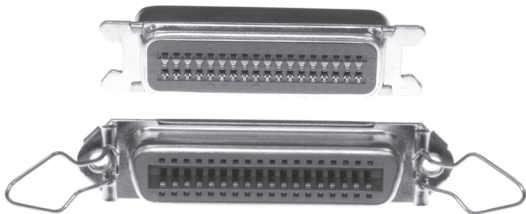

Material & finish

SHELL:
Steel
Nickel plated steel

PIN CONTACT:
Phosphor bronze
Gold plated


INSULATOR:
PBT & Glass-fibre reinforced UL 94-V0

CURRENT RATING:
5 Amp

DIELECTRIC STRENGTH:
1000V for one minute

INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)

TEMPERATURE:
-55°C to +105°C

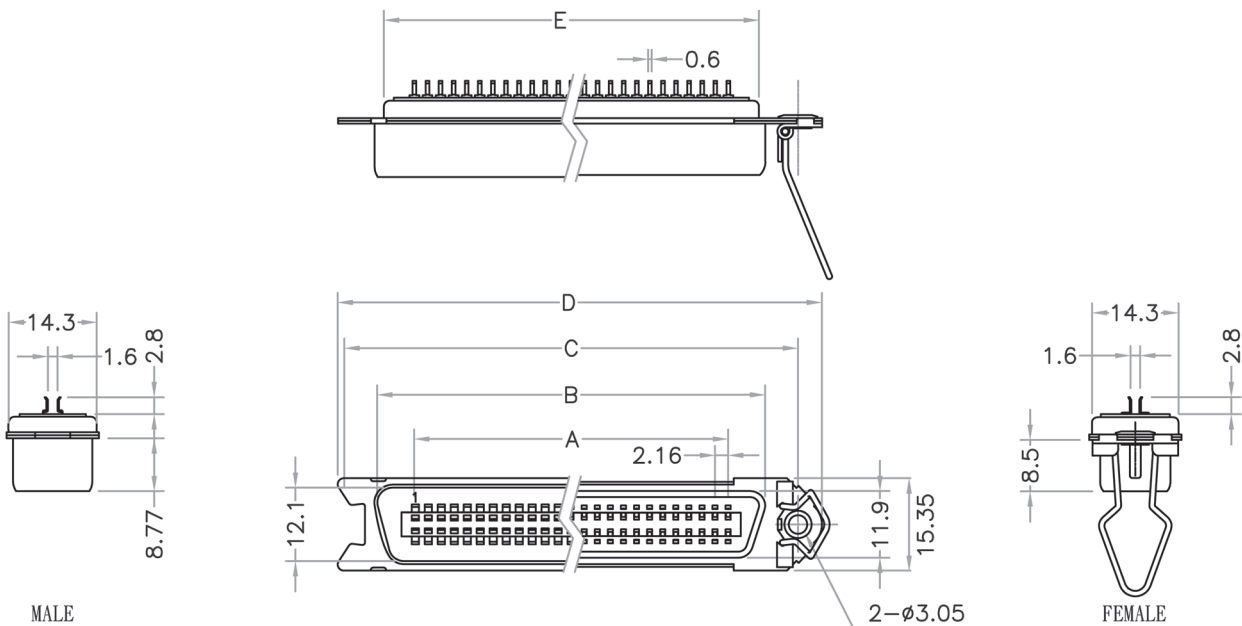

MALE

FEMALE

RM9 TYPE(MALE)

	A	B	D	E
36	36.72	49.3	62.1	46.6
50	51.84	64.4	77.4	61.9

RM4 TYPE (FEMALE)

	A	B	C	D	E
14	12.96	25.2	36.0	44.1	22.7
24	23.76	36.0	46.8	54.9	33.5
36	36.72	48.9	59.7	67.9	46.6
50	51.84	64.1	74.9	83.0	61.9

ORDERING INFORMATION

RM4 - XX X X X A X X X 0

