





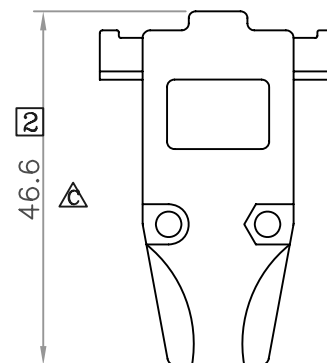


RoHS COMPLIANT

REV	DATE	DESCRIPTION
C	01/21/"15	#021-DA, 修正尺寸, 9PIN更換新模 · 更新&標註零件尺寸

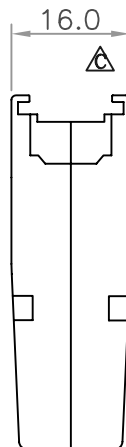

DIAMETER OF A : 6, 7, 8, 9.5 mm

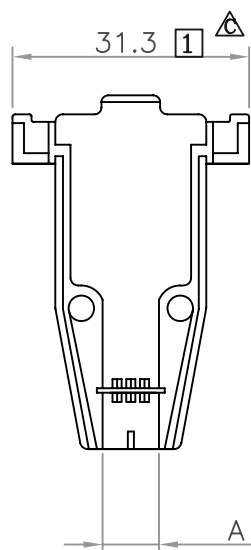

Material: Zinc alloy
Finished: Nickel plated

FU-YAO TECHNOLOGY CO., LTD.
復堯科技股份有限公司

MODEL NAME:
D-SUB 9 PIN COVER APPOSE SCREW








MARK EXPLAIN:
△:Revision Change
①:Important Dimension
①:Note

TOLERANCE:
0.000:
0.00 : ±0.50
0.0 : ±0.50
0. : ±0.50
ANGLE: ±3.0°
UNIT: mm


PART NO. CM2-09AXJAAAA0	
APPROVED BY: ALBERTA	FILE NO. FIG01799
CHECKED BY: ALAN	SCALE: FREE
DRAW BY: LEE	DATE : 960417

RoHS COMPLIANT

REV	DATE	DESCRIPTION
A	09/18/'20	#021-DA

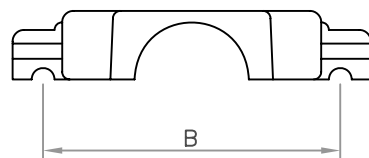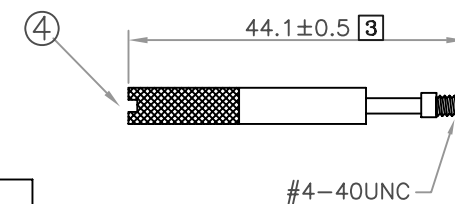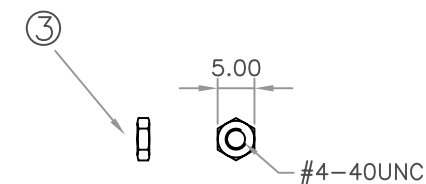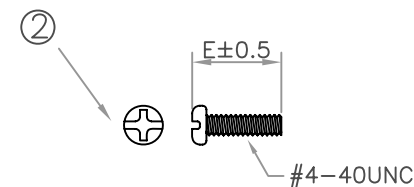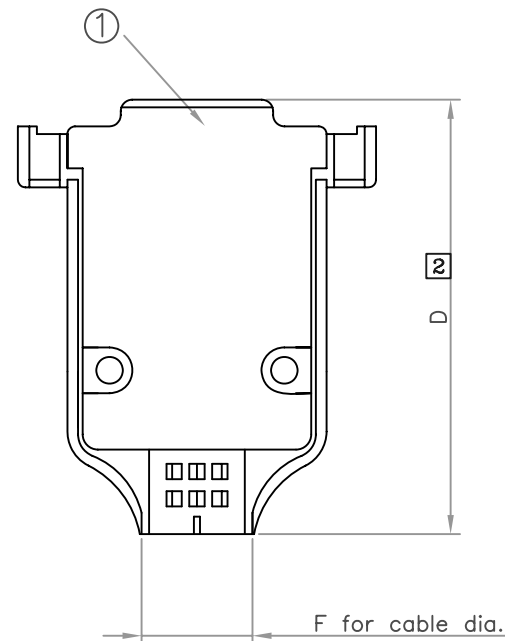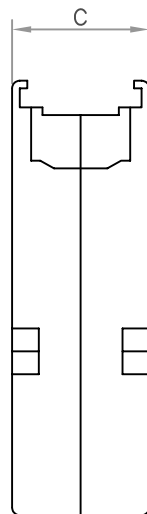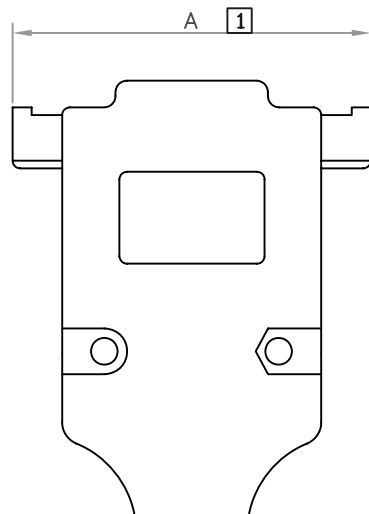

Positions	A	B	C	D	E	F
09	31.3	24.99	16.0	46.6	12.0	SEE NOTE
15	40.3	33.32	16.3	48.8	14.5	SEE NOTE
25	54	47.04	15.8	48.8	14.5	SEE NOTE
37	69.3	63.5	16.3	48.6	14.5	SEE NOTE

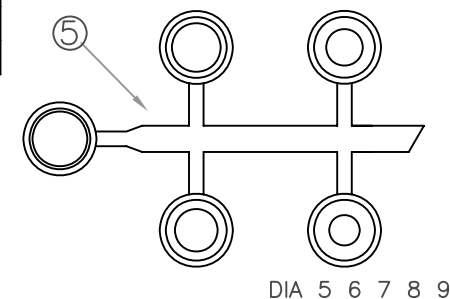

OD (for cable Dia.)
C: 7mm L: 11mm
G: 9mm Q: 13.5mm

NO	PARTS DESCRIPTION	QTY
1	180° METAL HOOD, NICKEL PLATED ZINC ALLOY	1 SET
2	BODY SCREW, NICKEL PLATED STEEL	2 PCS
3	NUT, NICKEL PLATED STEEL	2 PCS
4	SLOTTED THUMBSCREW, NICKEL PLATED STEEL	2 PCS
5	GROMMET (XG09-15)	1 PCS

NOTE :

Positions	F (for cable Dia.)(OD)
09	4.5, 5.5, 6, 7, 8, 9.5
15	7, 9, 10.5
25	8, 9, 10, 11, 13
37	9, 10, 11.5, 13.5, 15.5

FU-YAO TECHNOLOGY CO., LTD.

復堯科技股份有限公司

MODEL NAME:

D-SUB METAL HOOD (09-37) PIN
W/SLOTTED THUMBSCREW
(BRIGHT TYPE)

MARK EXPLAIN:

△:Revision Change
①:Important Dimension
①:Note

TOLERANCE:

0.000:
0.00 : ±0.50
0.0 : ±0.50
0. : ±0.50
ANGLE: ±5.0°

UNIT: mm

PART NO. CM2-xxAGIKGAAO

APPROVED BY: ALBERTA

CHECKED BY: EDEA

DRAW BY: ALAN

FILE NO. FIG02810-3

SCALE: 1/1

DATE: 1090918