


CENTRONIC 2.16mm I.D.C. MALE ALL PLASTIC


FU-YAO TECHNOLOGY CO., LTD.

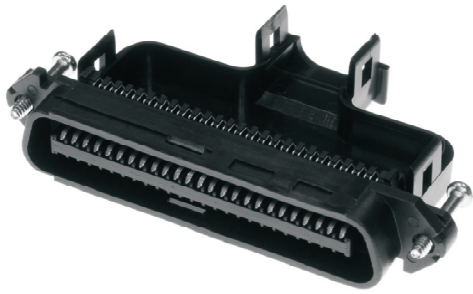

Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000M Ω Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

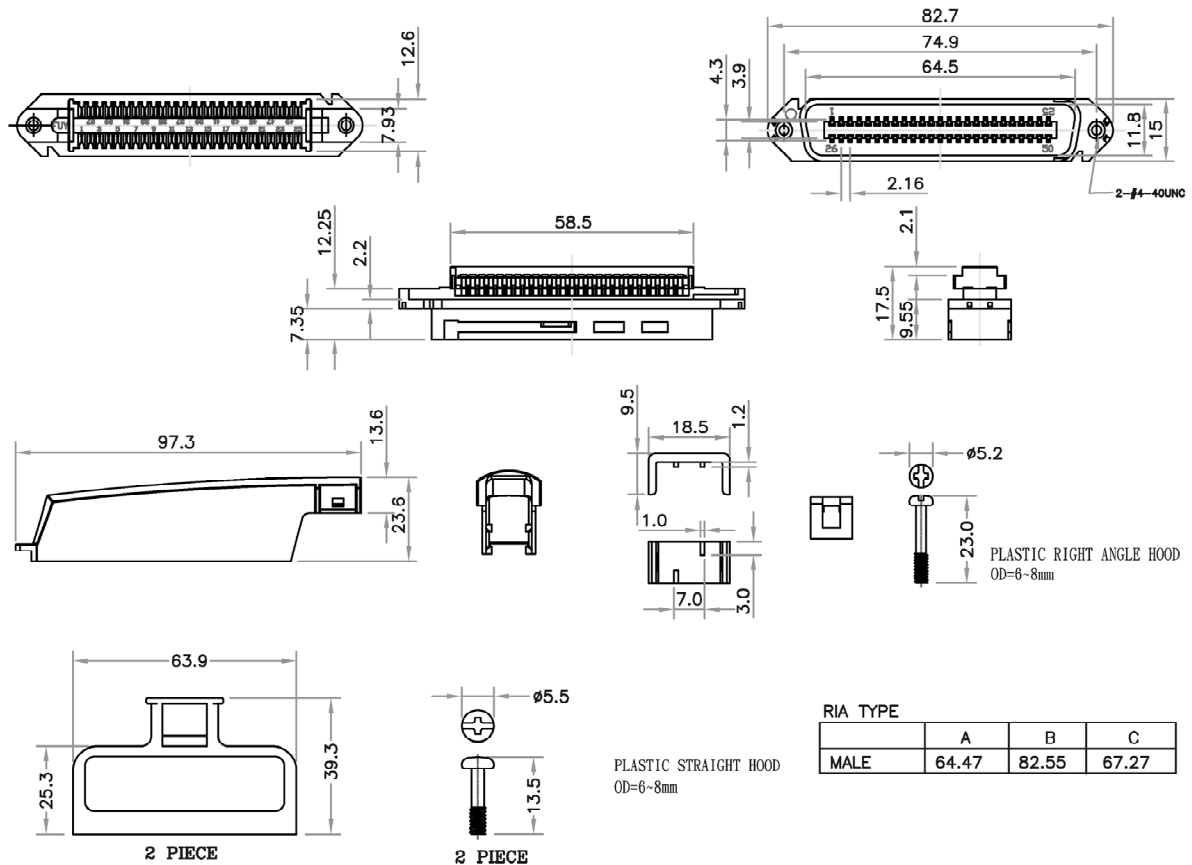

RIA TYPE

	A	B	C
MALE	64.47	82.55	67.27

ORDERING INFORMATION

RIA - 50 P K X X X X 0

TYPE
RIA: 57 IDC TYPE ALL
PLASTIC

No. OF CONTACTS
50

CONTACT TYPE
P: PLUG

INSULATOR COLOR
K: BLACK



CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"

SHELL
A: RIGHT ANGLE
B: STRAIGHT

SPECIAL FUNCTION
A: W/H PLUG DUST COVER
B: W/H SOCKET DUST COVER

SPECIAL FUNCTION
0: W/O SCREW
A: W/H 4*21 SCREW
B: W/H 4*11.5 SCREW
C: W/H 4*16 SCREW

CENTRONIC

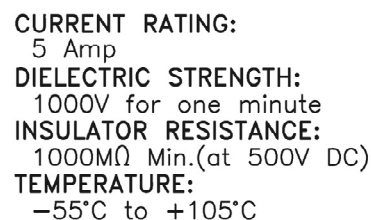

RIA - 50 S K X X X X 0

SHELL
A: RIGHT ANGLE
B: STRAIGHT