

RoHS COMPLIANT

REV	DATE	DESCRIPTION
A	04/20/"06	#117-ADxx-MFXAGXA
B	04/08/"09	Official Drawing

Material & Finish

SHELL:

Steel, Tin plated

PIN CONTACT:

Brass, Gold plated over nickel

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:

9,15,25,37

CURRENT RATING:

3 Amp

DIELECTRIC STRENGTH:

1000V for one minute

INSULATOR RESISTANCE:

1000M Ω Min. (at 500V DC)


TEMPERATURE:

-55°C to +105°C

PIN OUT

37Male

37Female

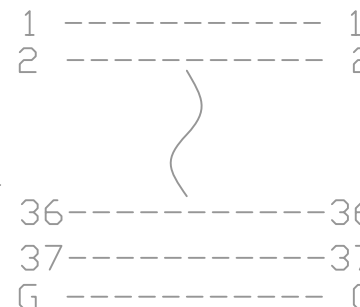


UNC #4-40 HEX SCREW

Circuits	A	B	C	D
9	16.92	25.00	30.86	16.40
15	25.25	33.28	39.26	24.70
25	39.06	47.04	53.10	38.50
37	55.42	63.50	69.40	54.80

UNC #4-40x3.3mm

UNC #4-40

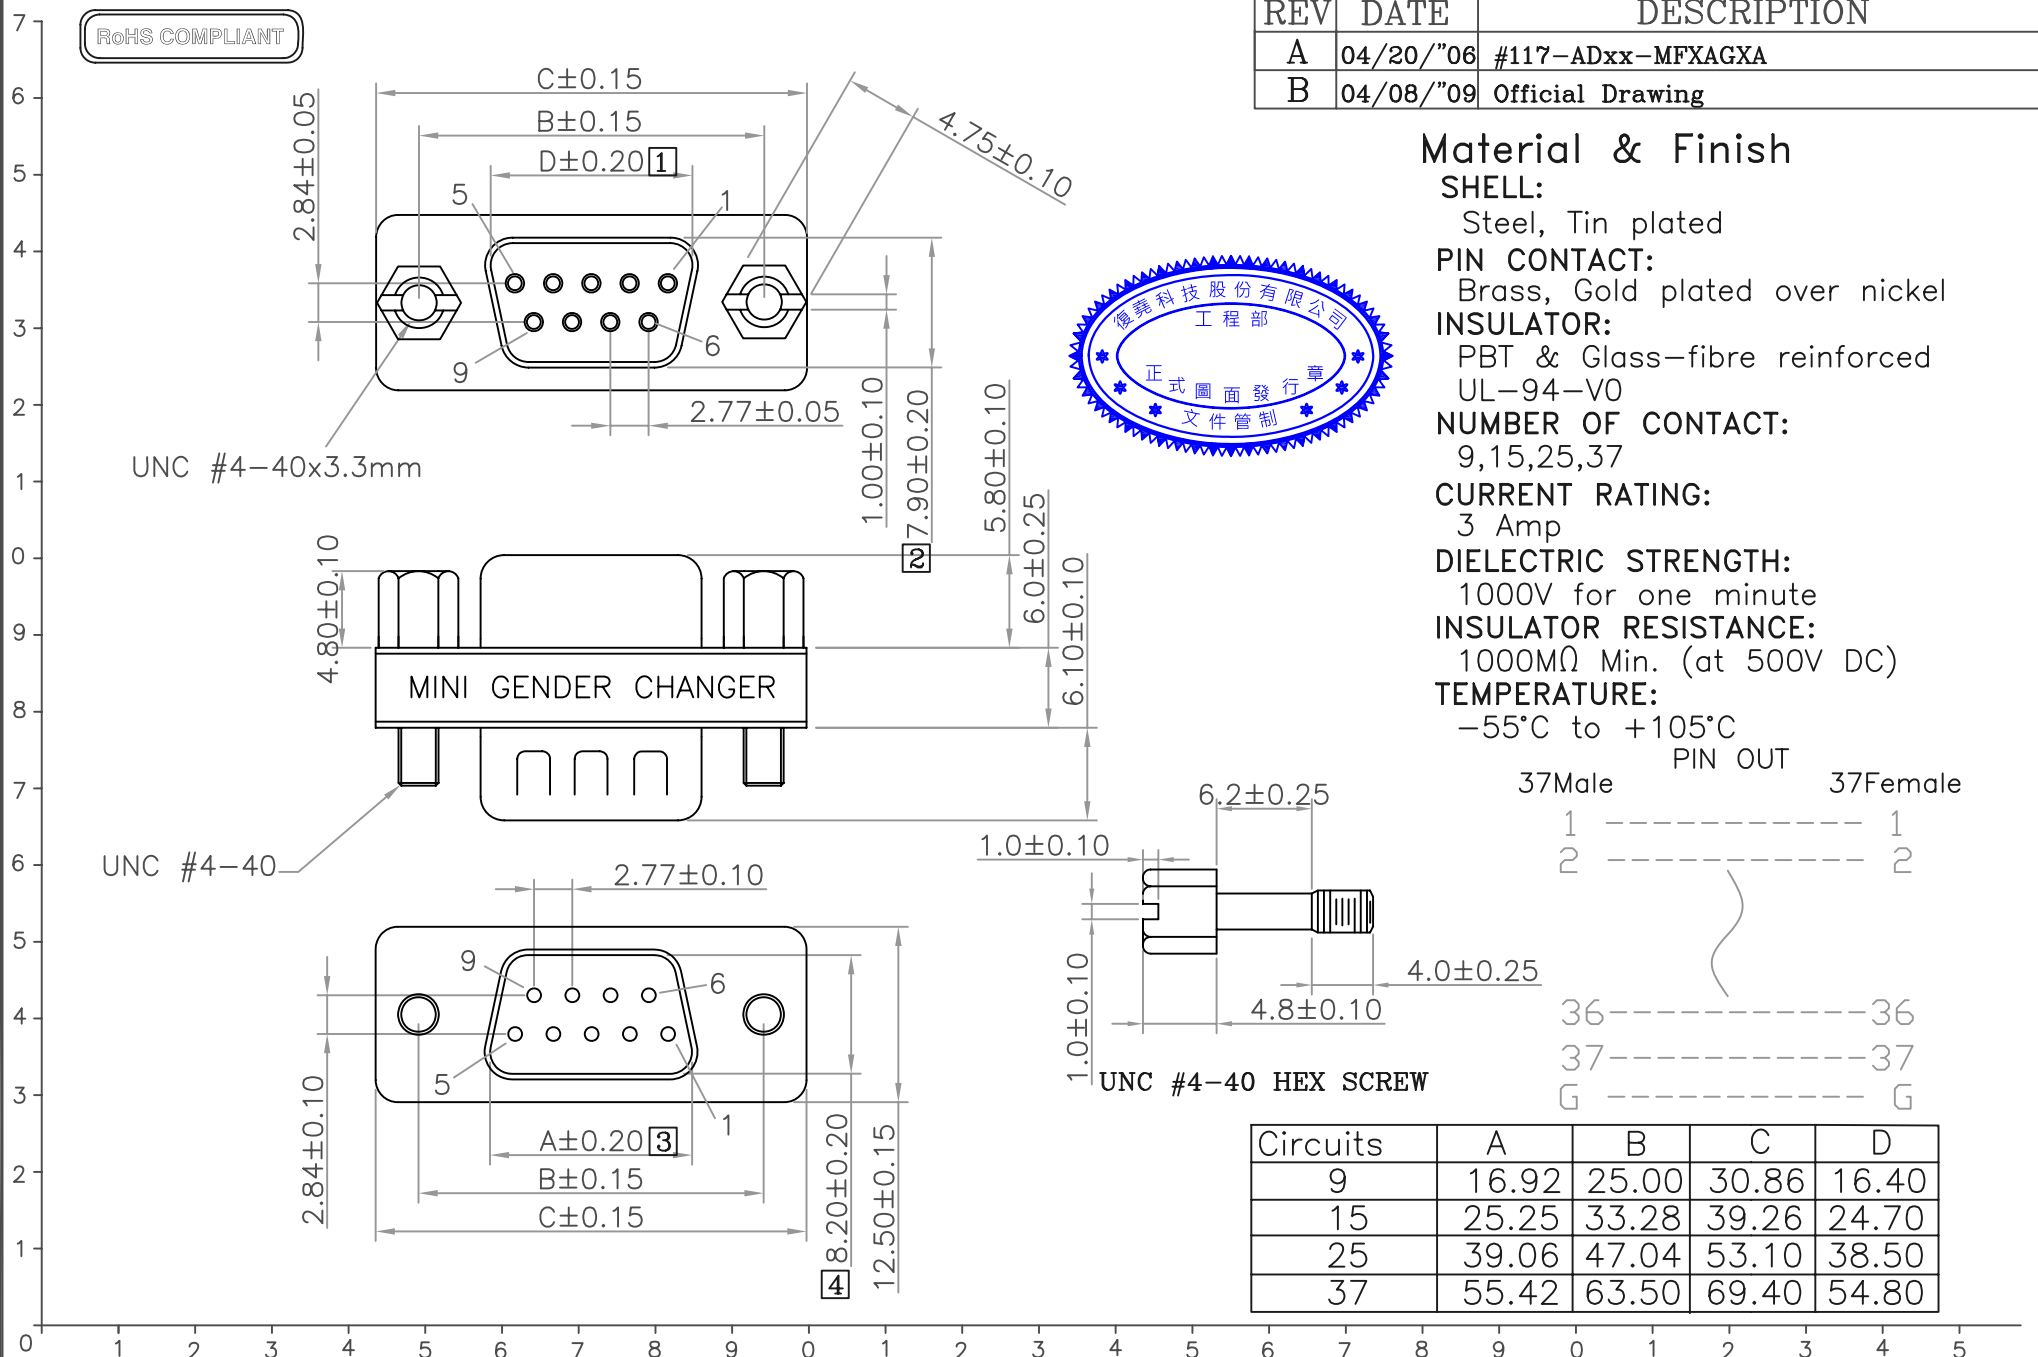

FU-YAO TECHNOLOGY CO., LTD.

MODEL NAME:

MINI GENDER CHANGER MALE/FEMALE

復堯科技股份有限公司

MARK EXPLAIN:

△:Revision Change

①:Important Dimension

①:Note

TOLERANCE:

0.000: ±0.10

0.00 : ±0.15

0.0 : ±0.25

0. : ±0.30

ANGLE: ±3.0°

UNIT: mm

PART NO. ADxxxx-AXXN00B0

APPROVED BY:

CHECKED BY:

DRAW BY: LEE

FILE NO.FIG00742-1

SCALE: FREE

DATE : 950420