

HIGH DENSITY DB CRIMP TYPE HOUSING


FU-YAO TECHNOLOGY CO., LTD.



Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

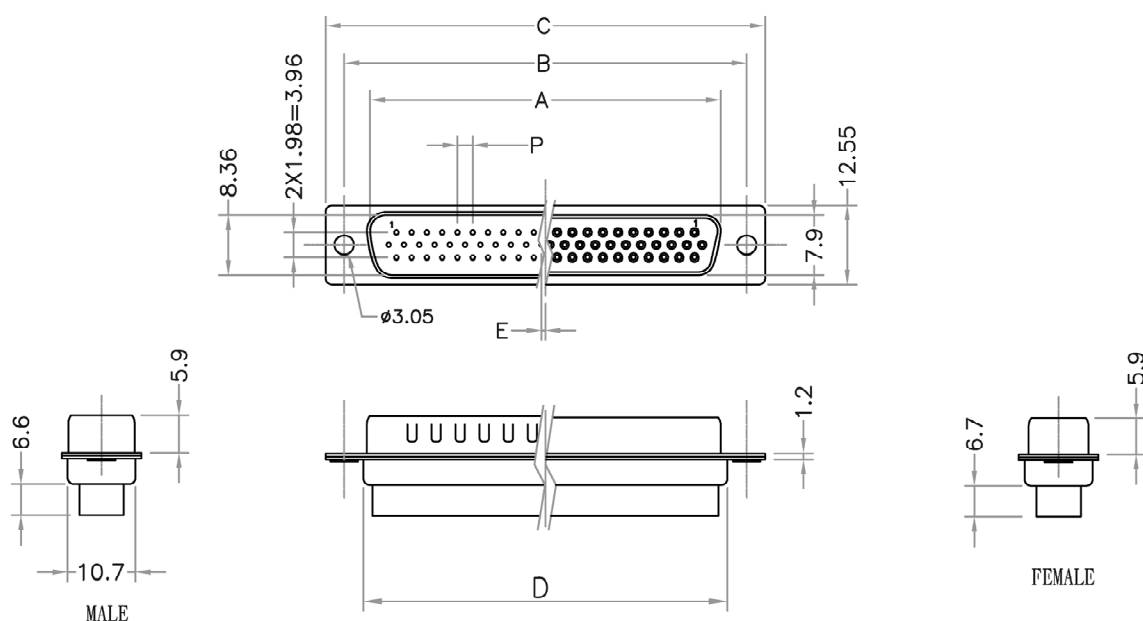

MALE

	A	B	C	D	E	P
15	16.92	24.99	30.81	19.28	0.25	2.29
26	25.25	33.32	39.14	27.65	0.25	2.29
44	38.96	47.04	53.04	41.30	0.25	2.29
62	55.42	63.50	69.32	57.44	0.31	2.41

FEMALE

	A	B	C	D	E	P
15	16.33	24.99	30.81	19.28	0.25	2.29
26	24.66	33.32	39.30	27.65	0.25	2.29
44	38.38	47.04	53.04	41.30	0.25	2.29
62	54.84	63.50	69.32	57.44	0.31	2.41

ORDERING INFORMATION

HH - XX X K X X X 0 0

TYPE

HH: HIGH DENSITY
D-SUB CRIMP

No. OF CONTACTS

15
26
44
62
78

CONTACT TYPE

P: PLUG
S: SOCKET

INSULATOR COLOR

K: BLACK

SHELL PLATING

B: TIN
C: NICKEL FRONT & TIN BACK

SPECIAL FUNCTION

A: BACK RIVET 3.0mm HEX
B: BACK RIVET 4.0mm HEX
C: BACK RIVET 5.8mm HEX

SPECIAL FUNCTION

A: FRONT RIVET 3.0mm HEX
B: FRONT RIVET 4.0mm HEX
C: FRONT RIVET 5.8mm HEX