

# D-SUB P.C.B. LOW PROFILE SMT

FU-YAO TECHNOLOGY CO., LTD.



## Material & finish

### SHELL:

Steel  
Tin plated steel

### PIN CONTACT:

Phosphor bronze  
Gold plated

### INSULATOR:

Nylon 6T, Fiber reinforced  
UL 94-V0, color black

### CURRENT RATING:

3 Amp

### DIELECTRIC STRENGTH:


AC 500V for one minute

### INSULATOR RESISTANCE:

1000MΩ Min.(at 500V DC)


### TEMPERATURE:

-55°C to +105°C

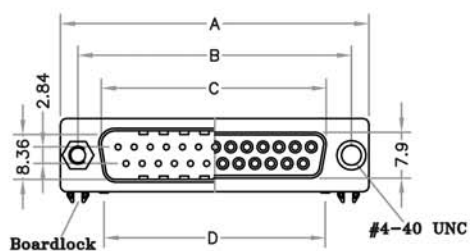



### MALE

	A	B	C	D	E
09	30.81	24.99	16.92	15.90	11.08
25	53.04	47.04	38.96	38.06	33.24

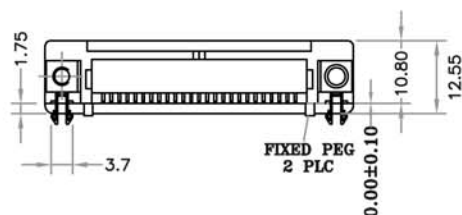

### FEMALE

	A	B	C	D	E
09	30.81	24.99	16.33	15.90	11.08
25	53.04	47.04	38.38	38.06	33.24

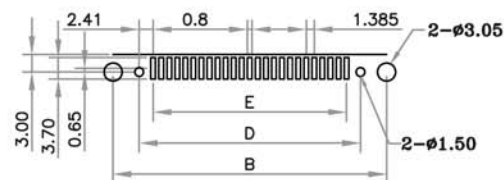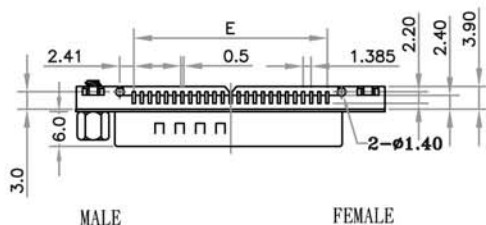

P. C. B. LAYOUT

## ORDERING INFORMATION

DL3 - XX X X X X A X X 0 0

### TYPE

DL3: D-SUB  
LOW PROFILE  
SMT TYPE

### No. OF CONTACTS

09  
25

### CONTACT TYPE

P: PLUG  
S: SOCKET

### INSULATOR COLOR

B: BLUE  
K: BLACK

### CONTACT PLATING

A: GOLD FLASH  
E: 15u"  
F: 30u"

### SHELL PLATING

A: NICKEL  
B: TIN

### GROUND TAB


A: RIVET #4-40 Z SHAPE

### SPECIAL FUNCTION


A: RIVET (#4-40)  
B: RIVET  
C: SCREW

### SPECIAL FUNCTION

A: 4.8mm HEX SCREW LOCK  
B: 5.8mm HEX SCREW LOCK  
C: W/H 4.8mm HEX



(Total 2520pcs/Big Carton)

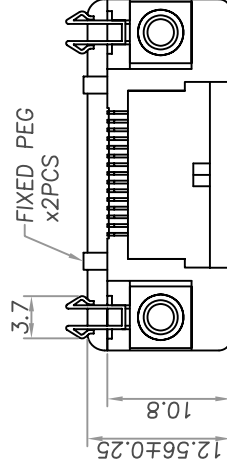

DATE : 1080725