


D-SUB P.C.B. DIP STRAIGHT

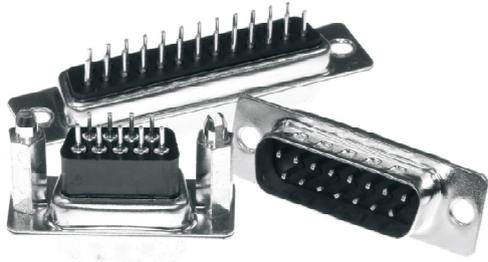

Material & finish

SHELL:
Steel
Nickel plated steel

PIN CONTACT:
Phosphor bronze
Gold plated

INSULATOR:
PBT & Glass-fibre reinforced UL 94-V0


CURRENT RATING:
5 Amp

DIELECTRIC STRENGTH:
1000V for one minute

INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)

TEMPERATURE:
-55°C to +105°C

D-SUB

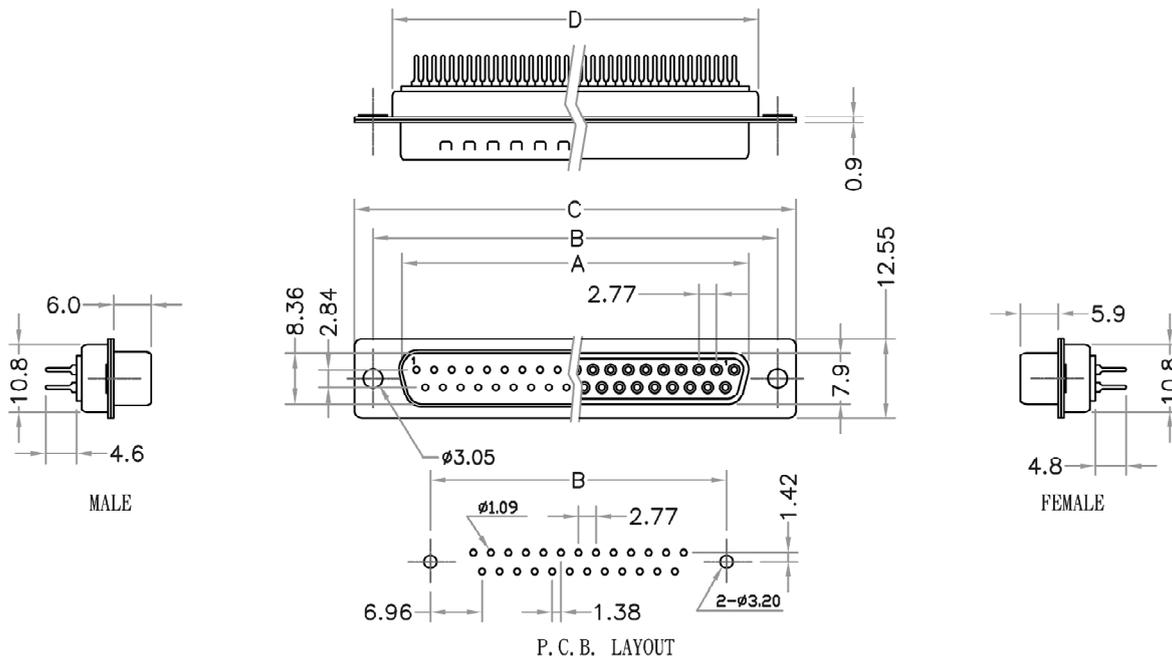

MALE

	A	B	C	D
09	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.65
25	38.96	47.04	53.04	41.30
37	55.42	63.50	69.32	57.44

FEMALE

	A	B	C	D
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.65
25	38.38	47.04	53.04	41.30
37	54.84	63.50	69.32	57.44

ORDERING INFORMATION

DSX - XX X X X X X X X 0 0 0

TYPE

DS1: D-SUB S/T DIP
DS2: D-SUB S/T DIP
MACHINE PIN

No. OF CONTACTS

09
15
25
37

CONTACT TYPE

P: PLUG
S: SOCKET

INSULATOR COLOR

B: BLUE
K: BLACK

CONTACT PLATING

A: GOLD FLASH
E: 15u"
F: 30u"

SHELL PLATING

B: TIN
C: NICKEL FRONT &
TIN BACK

INSULATOR LENGTH

A: STANDARD (H: 1mm)
B: HIGH (H: 5.2mm)
C: HIGH (H: 6.68mm))

SPECIAL FUNCTION

D: BACK RIVET 3.0mm HEX
E: BACK RIVET 4.0mm HEX
F: BACK RIVET 5.8mm HEX

SPECIAL FUNCTION

A: FRONT SCREW 4.8mm HEX
B: FRONT SCREW 5.0mm HEX
C: FRONT SCREW 5.8mm HEX