

CENTRONIC 2.16mm SOLDER ASSEMBLY R/A


FU-YAO TECHNOLOGY CO., LTD.



Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000M Ω Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

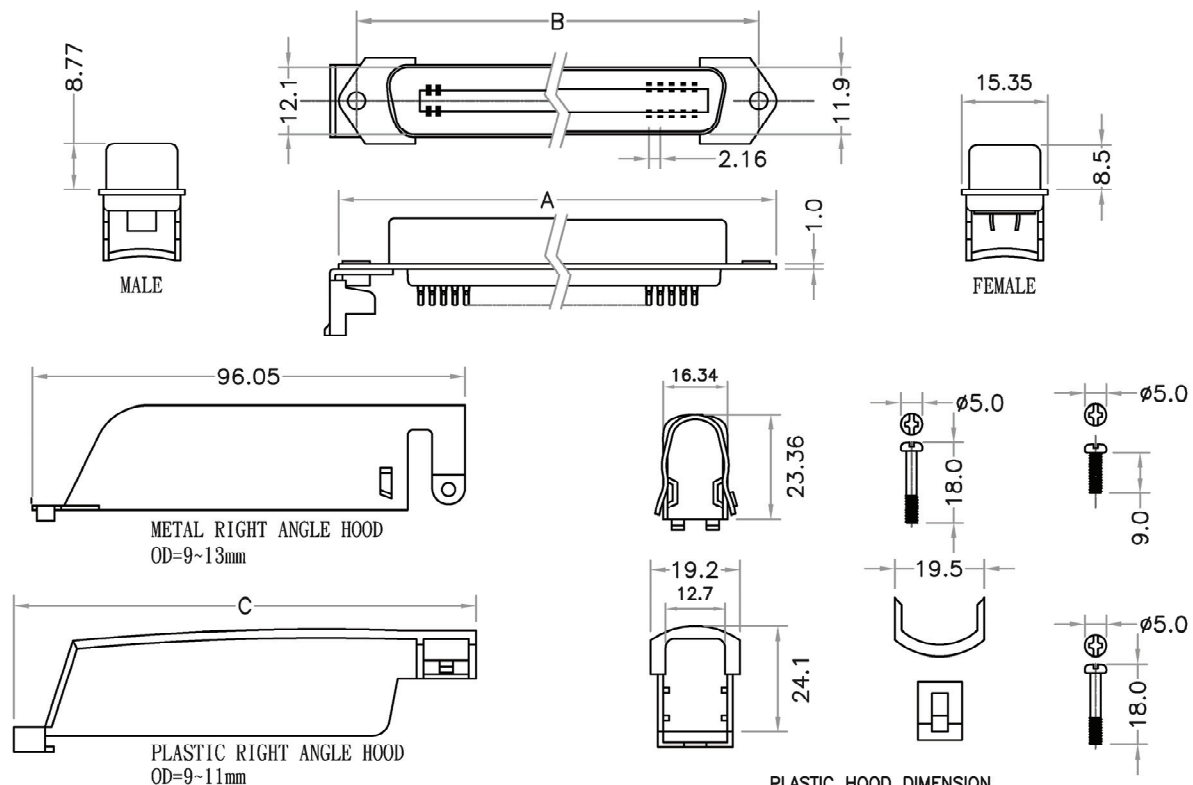

PLASTIC HOOD DIMENSION

Positions	A	B	C
36	67.7	59.7	90.1
50	82.8	74.9	103.7

METAL HOOD ONLY 50P

ORDERING INFORMATION

RC7 - XX X X X A X X 0 0 0 0

TYPE
RC7: 57 SOLDER MALE
R/A
RC8: 57 SOLDER FEMALE
R/A

No. OF CONTACTS
36
50

CONTACT TYPE
P: PLUG
S: SOCKET

INSULATOR COLOR
B: BLUE
K: BLACK

CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"

SHELL PLATING
A: NICKEL

COVER TYPE
A: R/A PLASTIC COVER
B: R/A METAL COVER

INSULATOR TYPE
A: STANDARD
B: GOBI
C: EASY