


DIP PLUG SERIES

FU-YAO TECHNOLOGY CO., LTD.



Material & finish

PIN CONTACT:

Phosphor bronze
Gold plated

INSULATOR:

PBT & Glass-fibre
reinforced UL 94-V0

OPERATING TEMPERATURE:

-55°C to +105°C

CURRENT RATING:



1 Amp DC

CONTACT RESISTANCE:

30 milliohms MAX.

INSULATOR RESISTANCE:

1000 Megohms Min.

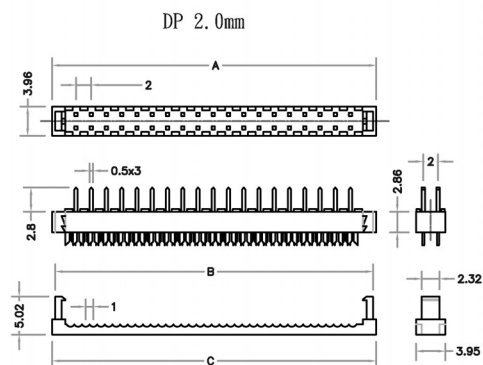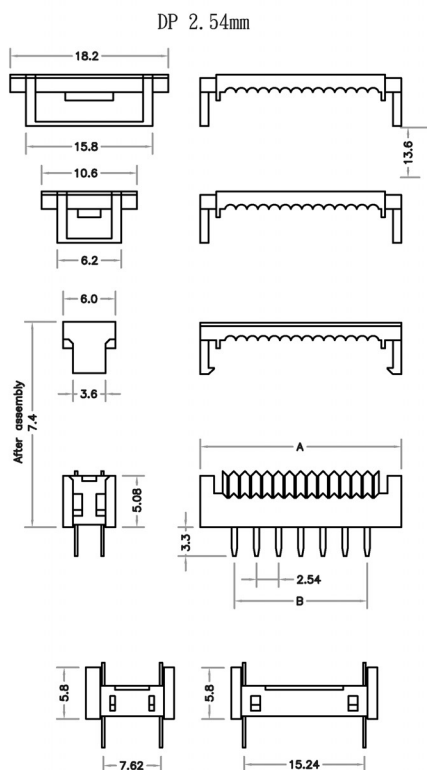

DIMENSION

Position	A	B	C
08	12.18	11.00	12.18
10	14.18	13.00	14.18
12	16.18	15.00	16.18
16	20.18	19.00	20.18
20	24.18	23.00	24.18
24	28.18	27.00	28.18
26	30.18	29.00	30.18
30	34.18	33.00	34.18
34	38.18	37.00	38.18
40	44.18	43.00	44.18
44	48.18	47.00	48.18
50	54.18	53.00	54.18

DIM A= 5.2+2.54xNo. of Positions
DIM B= 2.54xNo. of Contact-2.54

ORDERING INFORMATION

DP1 - XX X K B 0 0

TYPE

DP1: DIP PLUG 2.54mm
DP2: DIP PLUG 2.0mm
DP3: DIP PLUG 1.27mm

No. OF CONTACTS
08-64

PIN PITCH

A: 2.54mm
B: 7.62mm
C: 15.24mm

CONTACT PLATING
B: GOLD FLASH

INSULATOR COLOR
K: BLACK