


USB SERIES INFORMATION

FU-YAO TECHNOLOGY CO., LTD.

ORDERING INFORMATION

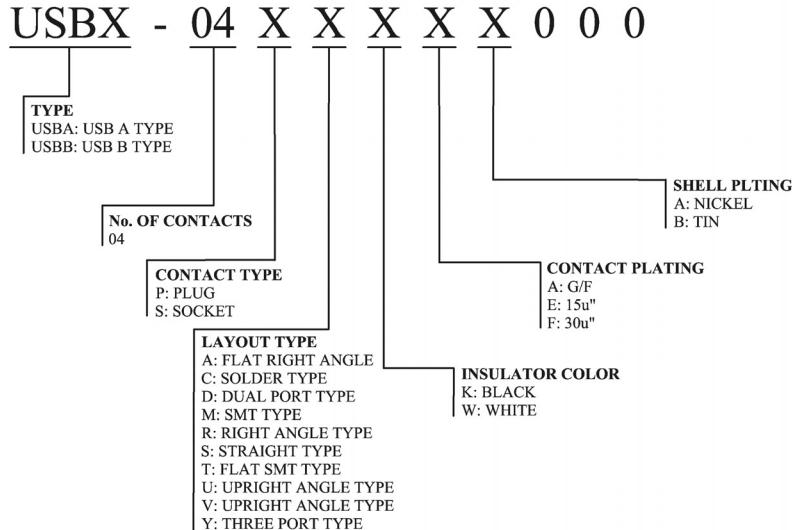




SPECIFICATION:

- Contact Resistance: 30m Ohm Max.
- Insulation Resistance : 1000m Ohm Min. At 500VDC.
- Rated Voltage And Current: 1.5A At 250 VAC Minimum
- Dielectric Withstanding Voltage :1. 750V AC (rms) for 1 Minute (Rev. 1.1)
2. 500V AC (rms) for 1 Minute (Rev. 2.0)
- Durability (Lite Test): 1500 Cycles.
- Insection Force: 35 Newton Maximum.
- Extraction Force: 10 Newton Minimum.




MATERIAL:

- Housing: PBT / Nylon Pa9t UL94V-0
- Terminal: Phosphor Bronze (Gold / Tin Plated Gold: 1~3u" Rev. 1.1)
(Gold / Tin Plated Gold: 30u" Rev. 2.0)
- Shell: Brass
- Spring Shield: Stainless
- Back Cover: Spcc



USB SERIES A TYPE FEMALE P.C.B.

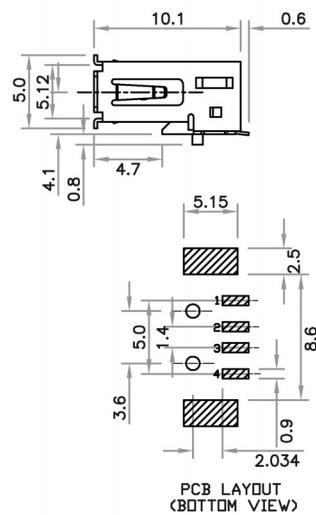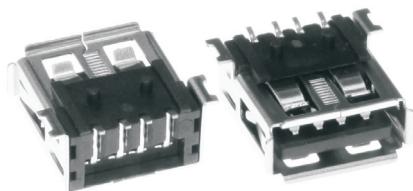

FU-YAO TECHNOLOGY CO., LTD.

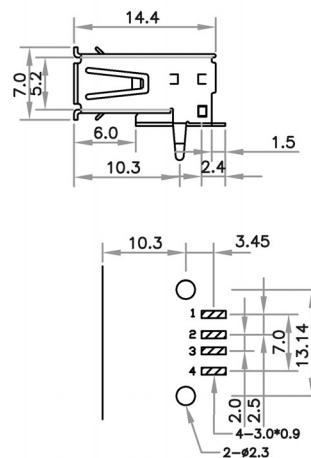

FU-YAO TECHNOLOGY CO., LTD.

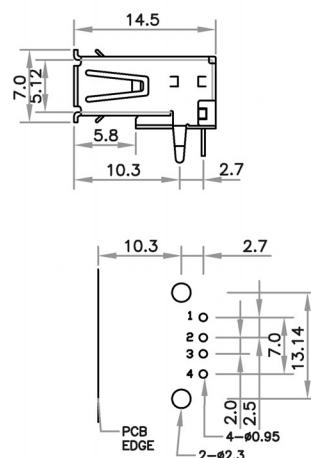


USB



Professional Manufactory : Computer Cable, Connector, Peripheral

USB SERIES A TYPE FEMALE P.C.B.


FU-YAO TECHNOLOGY CO., LTD.

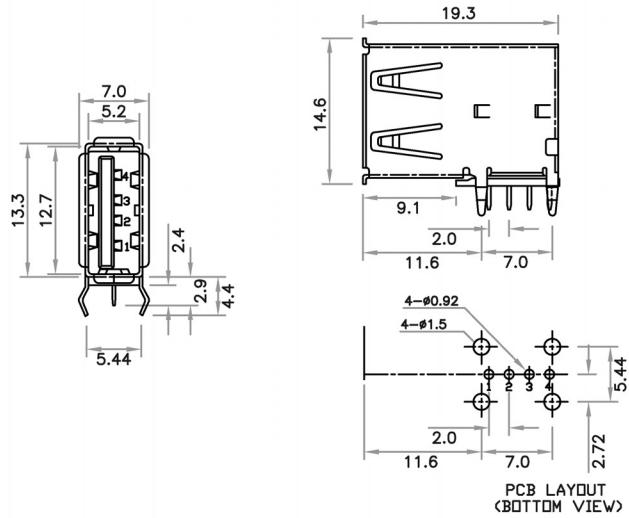

FU-YAO TECHNOLOGY CO., LTD.

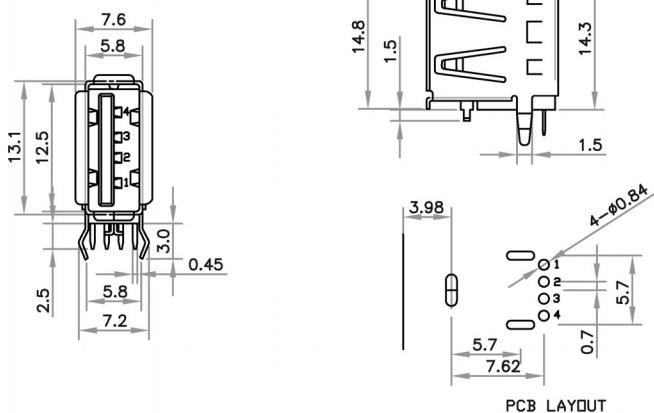
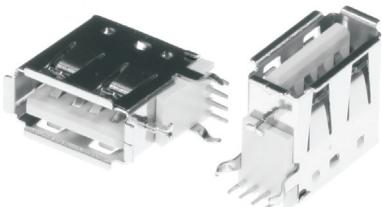


EU XRD TECHNOLOGY LTD. | 10

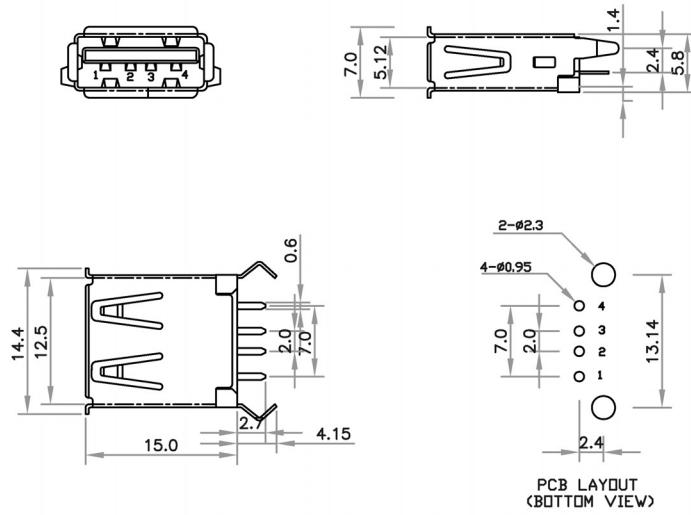



PCB LAYOUT
(BOTTOM VIEW)

USB SERIES A TYPE FEMALE P.C.B.

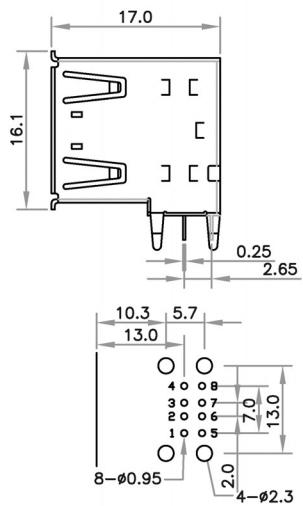

PCB LAYOUT
(BOTTOM VIEW)

FU-YAO TECHNOLOGY CO., LTD.

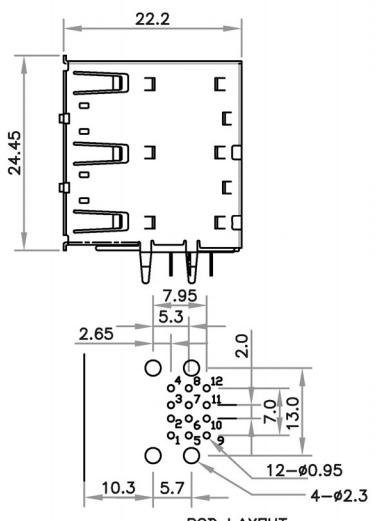

PCB LAYOUT
(BOTTOM VIEW)

FU-YAO TECHNOLOGY CO., LTD.

USB