


DVI CONNECTOR P.C.B. DIP RIGHT ANGLE

FU-YAO TECHNOLOGY CO., LTD.

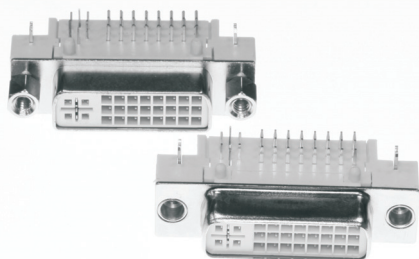

Material & finish

SHELL:

Zinc Alloy
Nickel plated

PIN CONTACT:

Phosphor bronze
Gold plated

INSULATOR:

PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:

1 Amp

CONTACT RESISTANCE:


30milliohms MAX. (initial)

INSULATOR RESISTANCE:


2000 Megohms Min.

VOLTAGE RATING:


250VAC. R.M.S.

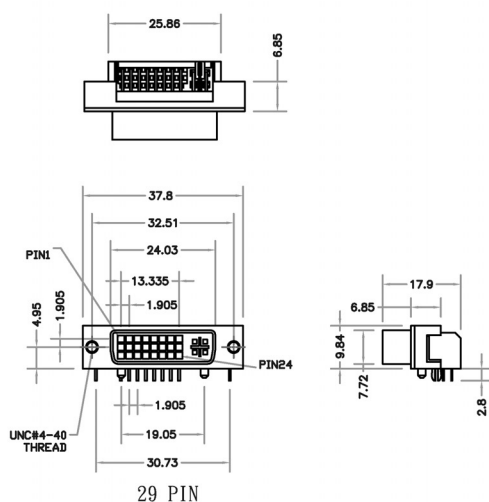


29 PIN

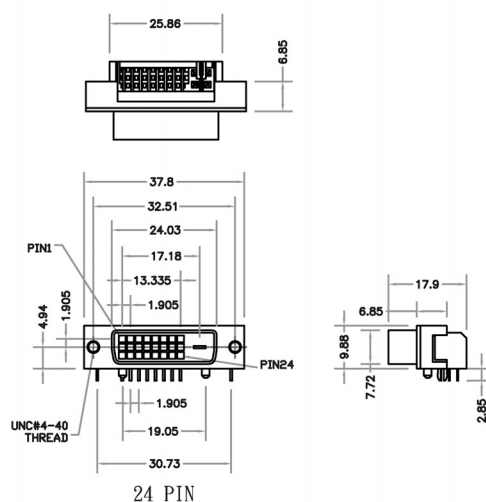

24 PIN

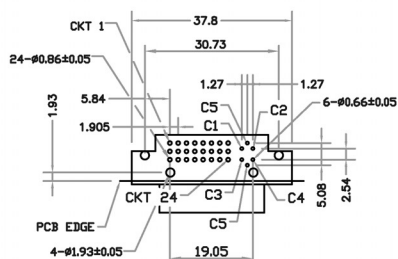

P. C. B. LAYOUT



P. C. B. LAYOUT

ORDERING INFORMATION

DVIR - 24 S X X X 0 X 0 0

TYPE
DVIR: DVI R/A DIP

No. OF CONTACTS
24
29

CONTACT TYPE
S: SOCKET

INSULATOR COLOR
K: BLACK
W: WHITE

SPECIAL FUNCTION
A: 4.8mm HEX SCREW LOCK
B: W/H 4.8mm HEX

GROUND TAB
0: STANDARD

SHELL PLATING
B: TIN
C: FRONT NICKEL BACK TIN

CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"