

# DVI CONNECTOR P.C.B. DIP STRAIGHT



## Material & finish

### SHELL:

Zinc Alloy  
Nickel plated

### PIN CONTACT:

Phosphor bronze  
Gold plated

### INSULATOR:

PBT & Glass-fibre  
reinforced UL 94-V0

### CURRENT RATING:

1 Amp

### CONTACT RESISTANCE:


30millohms MAX. (initial)

### INSULATOR RESISTANCE:


2000 Megohms Min.

### VOLTAGE RATING:


250VAC. R.M.S.

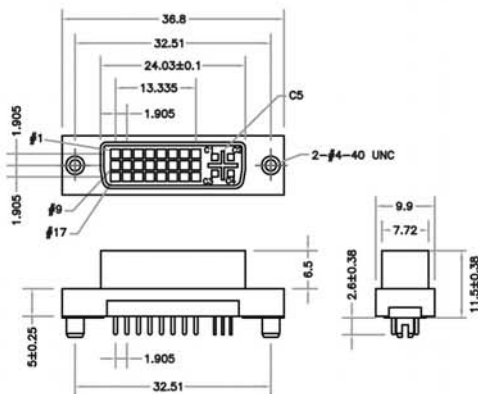


29 PIN

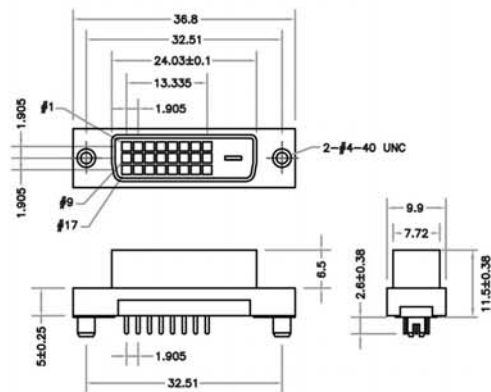

24 PIN

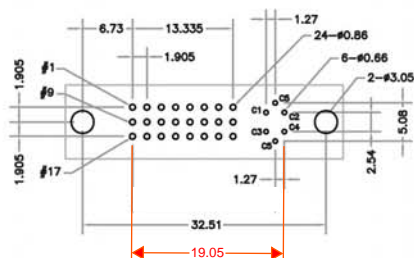

P. C. B. LAYOUT

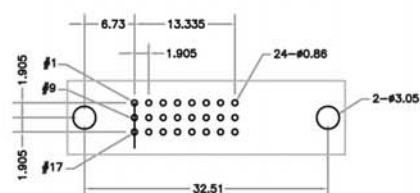

P. C. B. LAYOUT

## ORDERING INFORMATION

DVIS - 24 S X X X 0 X 0 0

TYPE  
DVIS: DVI S/T DIP

No. OF CONTACTS  
24  
29

CONTACT TYPE  
S: SOCKET

INSULATOR COLOR  
K: BLACK  
W: WHITE

SPECIAL FUNCTION  
A: 4.8mm HEX SCREW LOCK  
B: W/H 4.8mm HEX

GROUND TAB  
0: STANDARD

SHELL PLATING  
B: TIN  
C: FRONT NICKEL BACK TIN

CONTACT PLATING  
A: GOLD FLASH  
E: 15u"  
F: 30u"