


HALF PITCH PIN TYPE P.C.B. DIP RIGHT ANGLE


FU-YAO TECHNOLOGY CO., LTD.

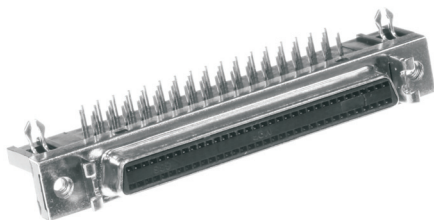




Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0


CURRENT RATING:
1 Amp
DIELECTRIC STRENGTH:
500V for one minute
INSULATOR RESISTANCE:
500M Ω Min.(at 500V DC)
TEMPERATURE:
-55° C to +105° C

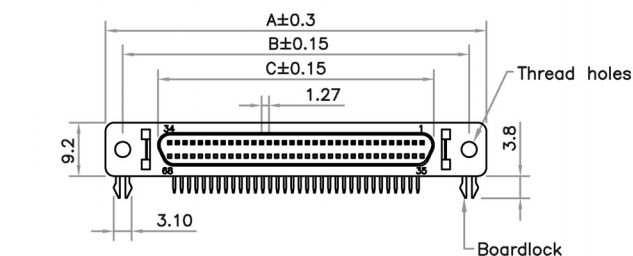

POSITION	A	B	C	D	E
26	37.19	31.26	19.45	31.26	15.24
50	52.43	46.50	34.70	46.50	30.48
68	63.86	57.92	46.13	57.90	41.91
100	84.18	78.23	66.45	78.10	62.23

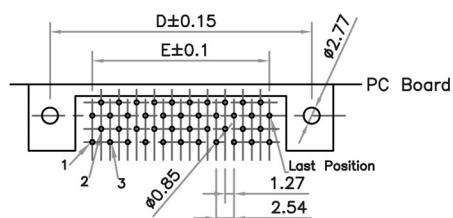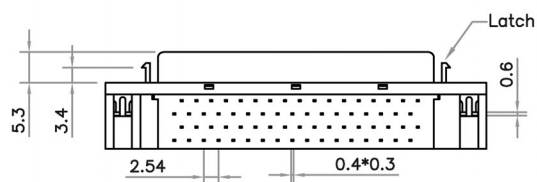

26P, 50P P. C. B. LAYOUT

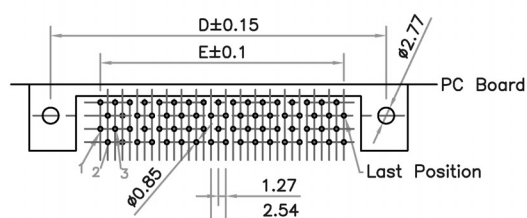

68P, 100P P. C. B. LAYOUT

ORDERING INFORMATION

MD5 - XX S K X A 0 0 X X 0 0 0

TYPE
MD5: 1.27mm PIN
TYPE CONNECTOR
RIGHT ANGLE TYPE

No. OF CONTACTS
26 ~ 100

CONTACT TYPE
S: SOCKET

INSULATOR COLOR
K: BLACK

CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"

SHELL PLATING
A: NICKEL

SHELL TYPE:
A: W/H LATCH
B: W/O LATCH

SPECIAL FUNCTION
A: #2-56 Z SHAPE
B: #2-56 L SHAPE