


MINI USB SERIES - INFORMATION

ORDERING INFORMATION

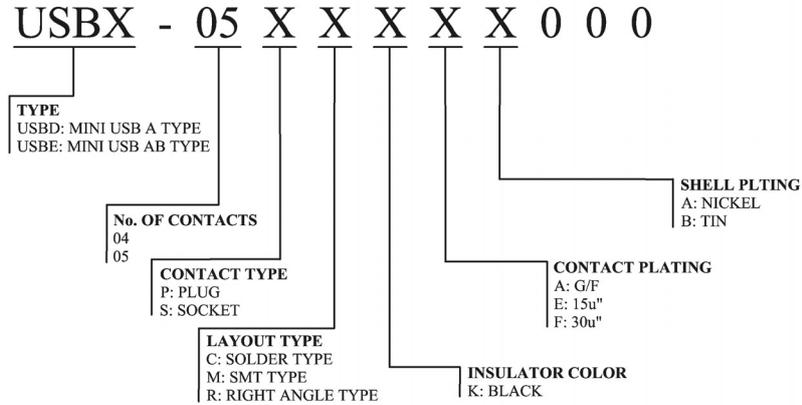




SPECIFICATION:

- Contact Resistance: 50m Ohm Max.
- Insulation Resistance : 100m Ohm Min. At 500VDC.
- Rated Voltage And Current: 1A At 30V AC Minimum
- Dielectric Withstanding Voltage : 100V AC (rms) for 1 Minute
- Durability (Lite Test): 5000 Cycles.
- Insection Force: 35 Newton Maximum.
- Extraction Force: 7 Newton Minimum.

MATERIAL:




- Housing: Nylon Pa9t UL94V-0
- Terminal: PBS (Gold/Tin Plated Gold: 30u")
- Shell: Brass

MINI USB SERIES

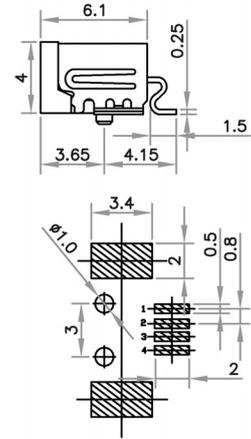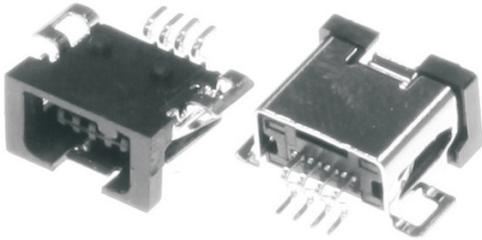



PCB LAYOUT
(BOTTOM VIEW)

FU-YAO TECHNOLOGY CO., LTD.

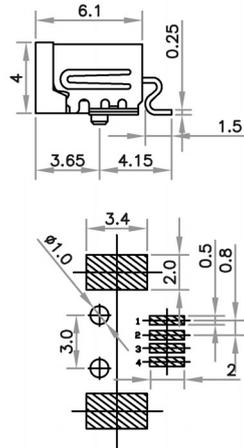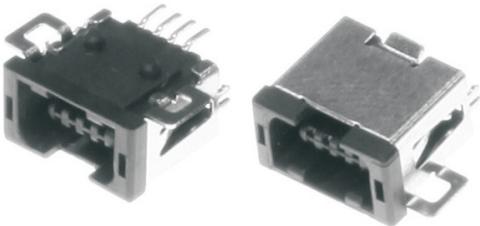

PCB LAYOUT
(BOTTOM VIEW)

FU-YAO TECHNOLOGY CO., LTD.

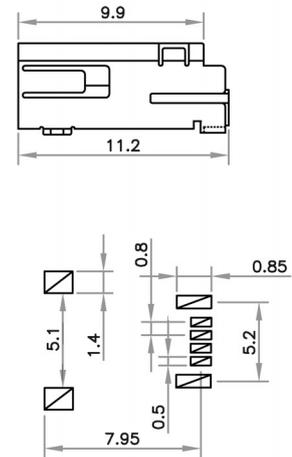

PCB LAYOUT
(BOTTOM VIEW)

USB