


HALF PITCH RIBBON P.C.B. DIP STRAIGHT

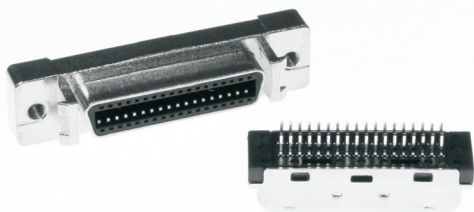

Material & finish

SHELL:

Steel
Nickel plated steel

PIN CONTACT:

Phosphor bronze
Gold plated

INSULATOR:

PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:

1 Amp

DIELECTRIC STRENGTH:


500V for one minute

INSULATOR RESISTANCE:


500M Ω Min.(at 500V DC)

TEMPERATURE:


-55° C to +105° C

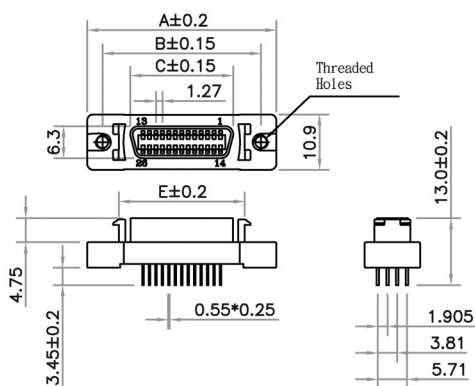

NO OF CONTACTS	A	B	C	D	E
14	29.60	23.64	12.63	7.65	17.08
20	33.38	27.44	16.44	11.43	20.60
26	37.20	31.20	20.25	15.24	24.64
36	43.50	37.60	26.60	21.59	30.99
40	46.08	40.14	29.14	24.13	33.30
50	52.60	46.80	35.50	30.48	39.88
68	64.00	57.90	46.90	41.91	51.30

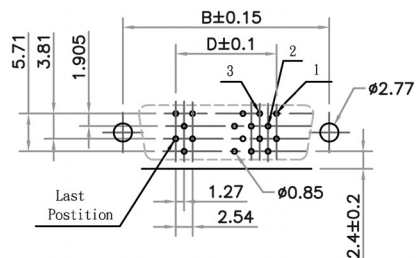

14P,26P,50P
P.C.B. LAYOUT

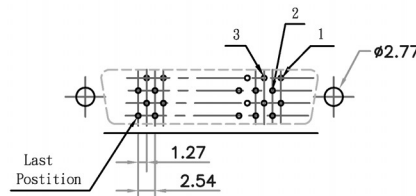

20P,36P,40P,68P
P.C.B. LAYOUT

ORDERING INFORMATION

MC3 - XX S K X A 0 0 X X 0 0 0

TYPE
MC3: 1.27mm RIBBON
TYPE CONNECTOR
STRAIGHT TYPE

No. OF CONTACTS
14 ~ 68

CONTACT TYPE
S: SOCKET

INSULATOR COLOR
K: BLACK

CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"

SHELL PLATING
A: NICKEL

SHELL TYPE:
A: W/H LATCH
B: W/O LATCH

SPECIAL FUNCTION
E: M2.6 Z SHAPE
F: M2.6 L SHAPE