


HALF PITCH RIBBON FOR SOLDER

HALF PITCH

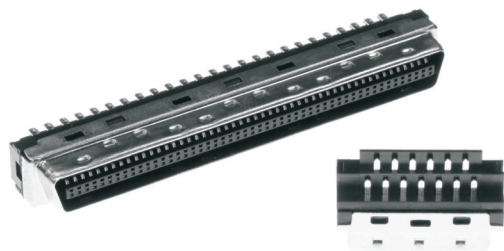

Material & finish

- SHELL:**
Steel
Nickel plated steel



PIN CONTACT:
Phosphor bronze
Gold plated

INSULATOR:
PBT & Glass-fibre reinforced UL 94-V0
- CURRENT RATING:**
1 Amp



DIELECTRIC STRENGTH:
500V for one minute

INSULATOR RESISTANCE:
500M Ω Min.(at 500V DC)

TEMPERATURE:
-55° C to +105° C



MALE			
NO OF CONTACTS	A	B	
14	16.45	12.80	
20	20.20	16.60	
26	24.00	20.40	
36	30.40	26.70	
50	39.30	35.60	
68	50.60	46.95	



FEMALE			
NO OF CONTACTS	A	B	C
26	24.00	20.25	9.30
36	30.40	26.50	8.60
50	39.20	35.50	9.30
68	50.60	46.93	9.30

ORDERING INFORMATION

MC1 - XX X K X A X X X 0 0 0 0

