


HALF PITCH RIBBON FOR I.D.C.




FU-YAO TECHNOLOGY CO., LTD.

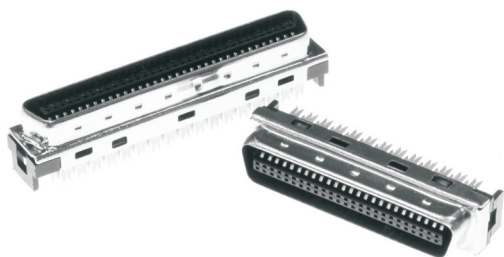

Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0



CURRENT RATING:
1 Amp
DIELECTRIC STRENGTH:
500V for one minute
INSULATOR RESISTANCE:
500M Ω Min.(at 500V DC)
TEMPERATURE:
-55° C to +105° C




MALE
B±0.15






Termination Cover
(1 Places)



MALE




FEMALE



FEMALE



Wire Holder
(2 Places)



MALE							
NO OF CONTACTS	A	B	C	D	E	F	G
14	14.38	16.38	11.18	16.45	12.80	8.60	13.10
20	18.10	20.10	14.90	20.20	16.60	9.50	13.10
26	22.10	24.00	18.80	24.00	20.40	9.50	13.10
36	28.35	29.40	25.21	30.40	26.70	8.60	13.10
50	37.30	38.30	34.10	39.30	35.60	9.50	13.60
68	48.75	50.80	45.65	50.90	46.95	9.30	13.10
100	69.05	71.05	65.85	71.05	67.29	9.30	13.50

FEMALE							
NO OF CONTACTS	A	B	C	D	E	F	G
26	22.10	24.00	18.70	24.00	20.25	9.30	13.85
36	28.35	29.40	25.21	30.40	26.50	8.60	13.85
50	37.30	38.30	34.10	39.20	35.50	9.30	14.40
68	48.67	50.70	45.50	50.60	46.93	9.30	13.85

ORDERING INFORMATION

MC2 - XX X K X A X X X 0 0 0 0

TYPE
MC2: 1.27 RIBBON TYPE
IDC FOR ROUND
CABLE

No. OF CONTACTS
14 ~ 100

CONTACT TYPE
P: PLUG
S: SOCKET

INSULATOR COLOR
K: BLACK

COVER TYPE:
A: NO COVER
I: PLASTIC COVER
M: METAL COVER

SHELL PLATING
A: NICKEL

CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"

SPECIAL FUNCTION
C: WITH LATCH
M: WITH M2.6 SCREW

COVER OD:
6-14mm