


HALF PITCH RIBBON P.C.B. DIP RIGHT ANGLE


FU-YAO TECHNOLOGY CO., LTD.

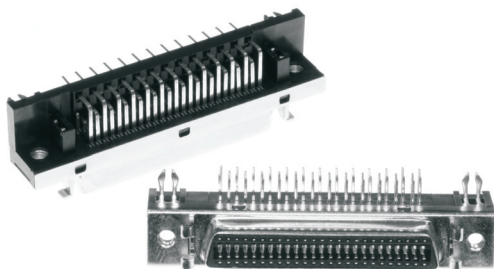




Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0


CURRENT RATING:
1 Amp
DIELECTRIC STRENGTH:
500V for one minute
INSULATOR RESISTANCE:
500M Ω Min.(at 500V DC)
TEMPERATURE:
-55° C to +105° C

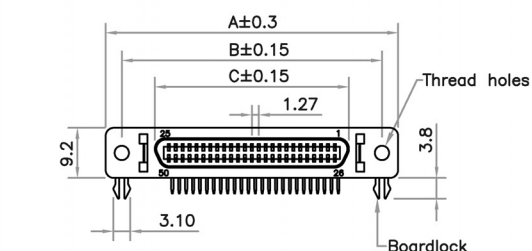

POSITION	A	B	C	D	E
14	29.57	23.64	12.63	23.64	7.62
20	33.38	27.45	16.44	27.45	11.43
26	37.19	32.26	20.25	31.26	15.24
36	43.54	37.61	26.60	37.61	21.59
50	52.50	46.50	35.49	46.50	30.48
68	63.86	57.93	46.92	57.93	41.91
100	84.18	78.23	67.10	78.10	62.23

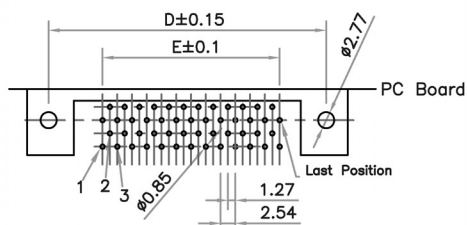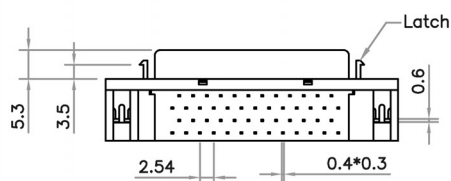

14P, 26P, 50P P. C. B. LAYOUT

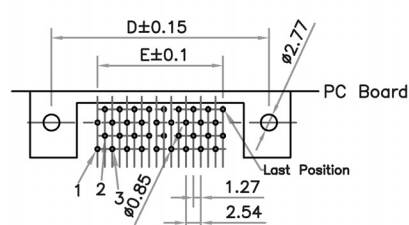

20P, 36P, 68P, 100P P. C. B. LAYOUT

ORDERING INFORMATION

MC5 - XX S K X A 0 0 X X 0 0 0

TYPE
MC5: 1.27mm RIBBON
TYPE CONNECTOR
RIGHT ANGLE TYPE

No. OF CONTACTS
14 ~ 100

CONTACT TYPE
S: SOCKET

INSULATOR COLOR
K: BLACK

SPECIAL FUNCTION
E: M2.6 Z SHAPE
F: M2.6 L SHAPE

SHELL TYPE:
A: W/H LATCH
B: W/O LATCH

SHELL PLATING
A: NICKEL

CONTACT PLATING
A: GOLD FLASH
E: 15u"
F: 30u"