


CENTRONIC 2.16mm P.C.B. DIP RIGHT ANGLE



FU-YAO TECHNOLOGY CO., LTD.

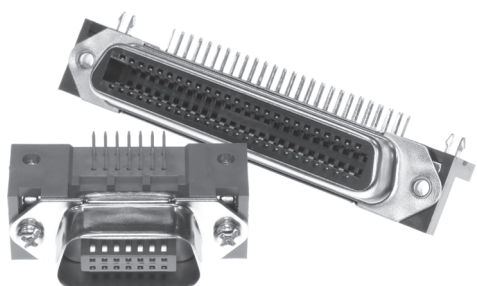

Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:
3 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

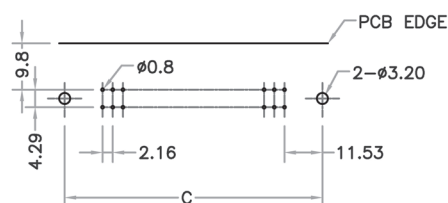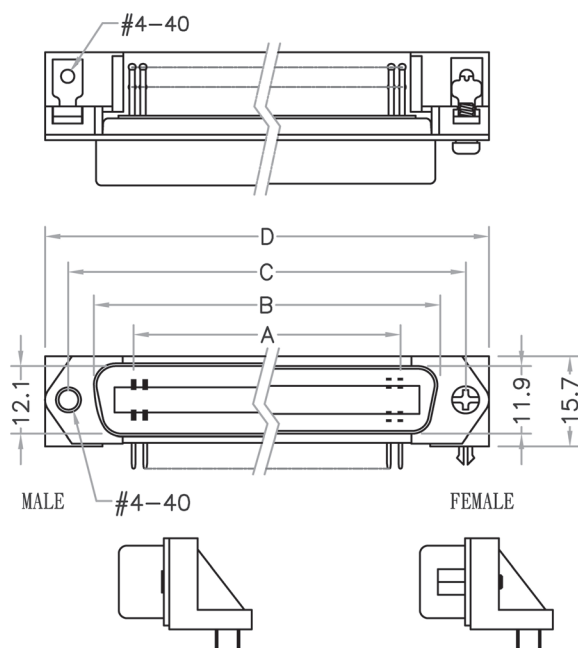

P. C. B. LAYOUT

RIVET+L SHAPE

HEX SCREW LOCK+L SHAPE

SCREW LOCK+BOARDLOCK

RR1 TYPE (MALE)

	A	B	C	D	E
14	12.96	25.6	36.0	43.9	8.77
24	23.76	36.3	46.8	54.7	8.77
36	36.72	49.3	59.6	67.7	8.77
50	51.84	64.4	74.9	82.8	8.77

RR2 TYPE (FEMALE)

	A	B	C	D	E
14	12.96	25.2	36.0	43.9	8.5
24	23.76	36.0	46.8	54.7	8.5
36	36.72	48.9	59.7	67.7	8.5
50	51.84	64.1	74.9	82.8	8.5

ORDERING INFORMATION

RR1 - XX X X X A X X X X X 0

TYPE

RR1: 57 R/A DIP MALE
RR2: 57 R/A DIP FEMALE

No. OF CONTACTS

14
24
36
50

CONTACT TYPE

P: PLUG
S: SOCKET

INSULATOR COLOR

B: BLUE
K: BLACK

CONTACT PLATING

A: GOLD FLASH
E: 15u"
F: 30u"

SHELL PLATING

A: NICKEL

TERMANAL LENGTH

A: 4.75mm
G: 3.2mm

GROUND TAB

A: L SHAPE
P: Z SHAPE

SPECIAL FUNCTION

A: W/H 4*7 SCREW
K: W/H 4.8mm HEX
N: W/H IEEE 488 HEX

SPECIAL FUNCTION

A: SCRW LOCK
M: RIVET
Q: RIVET + SCREW LOCK

SPECIAL FUNCTION

A: 4.8mm HEX SCRW LOCK
H: IEEE488 HEX SCREW LOCK