

CENTRONIC 2.16mm I.D.C. FOR FLAT CABLE


FU-YAO TECHNOLOGY CO., LTD.



Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre reinforced UL 94-V0

CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

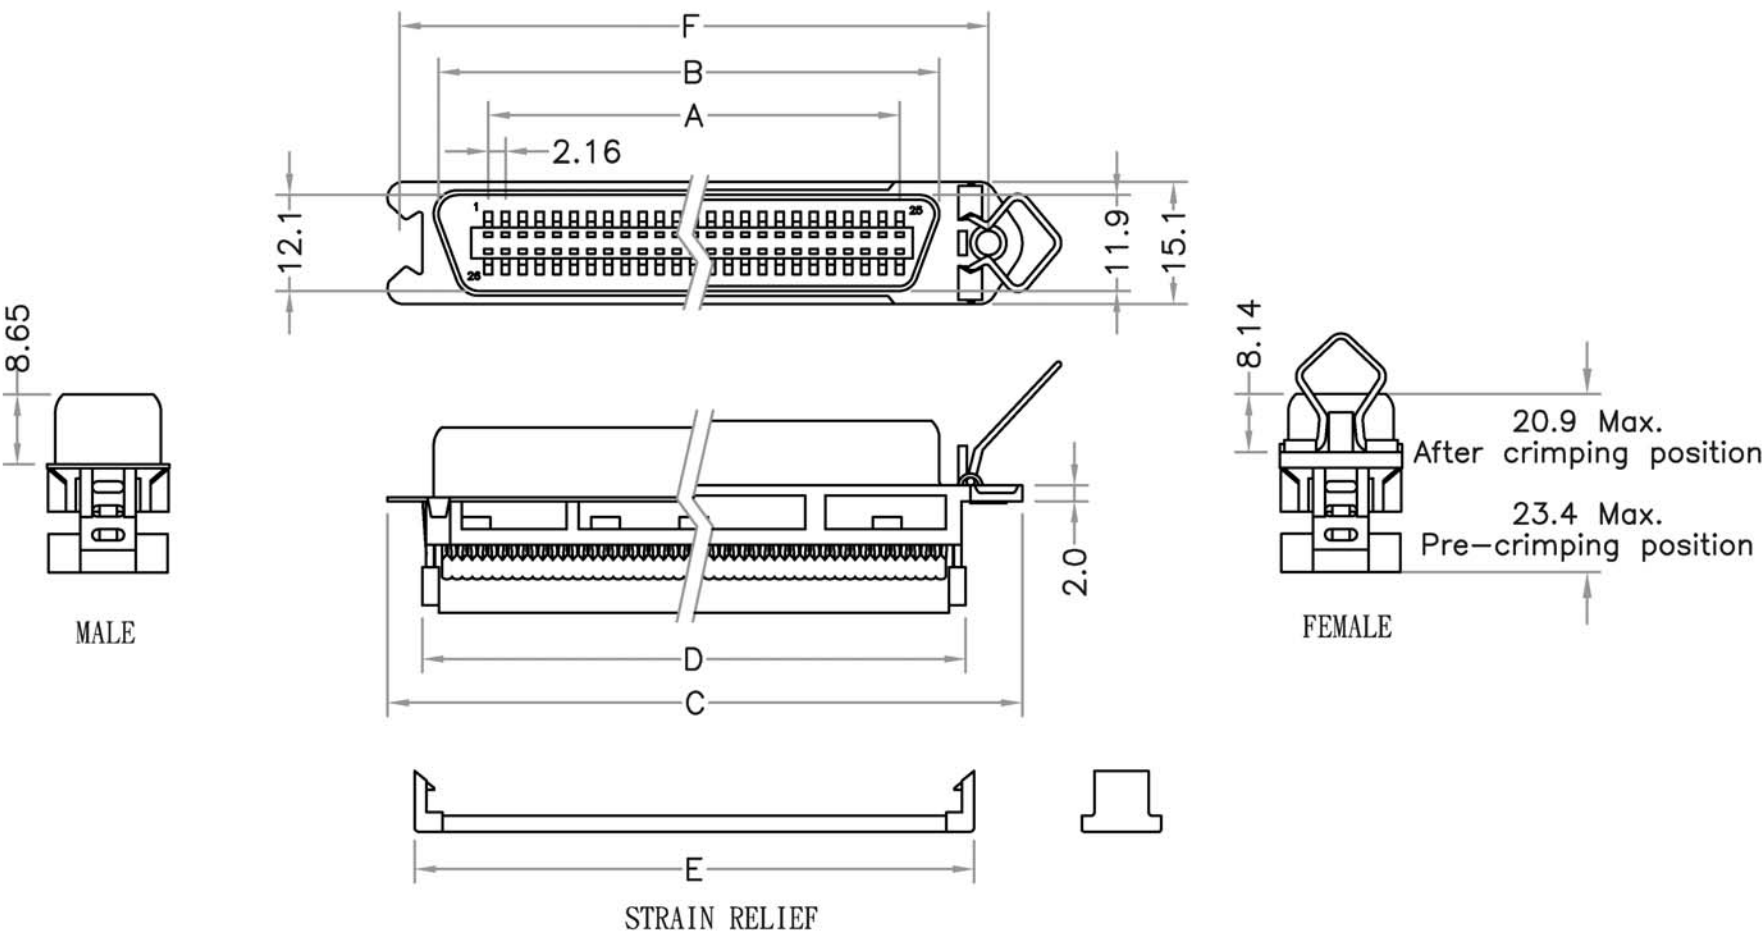

RF9 TYPE (MALE)

| | A | B | C | D | E |
|----|-------|------|------|------|------|
| 24 | 23.76 | 36.3 | 49.3 | 35.5 | 37.5 |
| 36 | 36.72 | 49.3 | 62.0 | 51.5 | 53.7 |
| 50 | 51.84 | 64.4 | 77.4 | 68.5 | 70.9 |

RF4 TYPE (FEMALE)

| | A | B | C | D | E | F |
|----|-------|------|------|------|------|-------|
| 24 | 23.76 | 36.0 | 54.7 | 35.5 | 37.5 | 46.78 |
| 36 | 36.72 | 48.9 | 67.8 | 53.3 | 54.4 | 59.74 |
| 50 | 51.84 | 64.1 | 82.8 | 68.5 | 70.5 | 74.85 |

ORDERING INFORMATION

