

CENTRONIC 2.16mm SOLDER MALE ALL PLASTIC


FU-YAO TECHNOLOGY CO., LTD.



Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

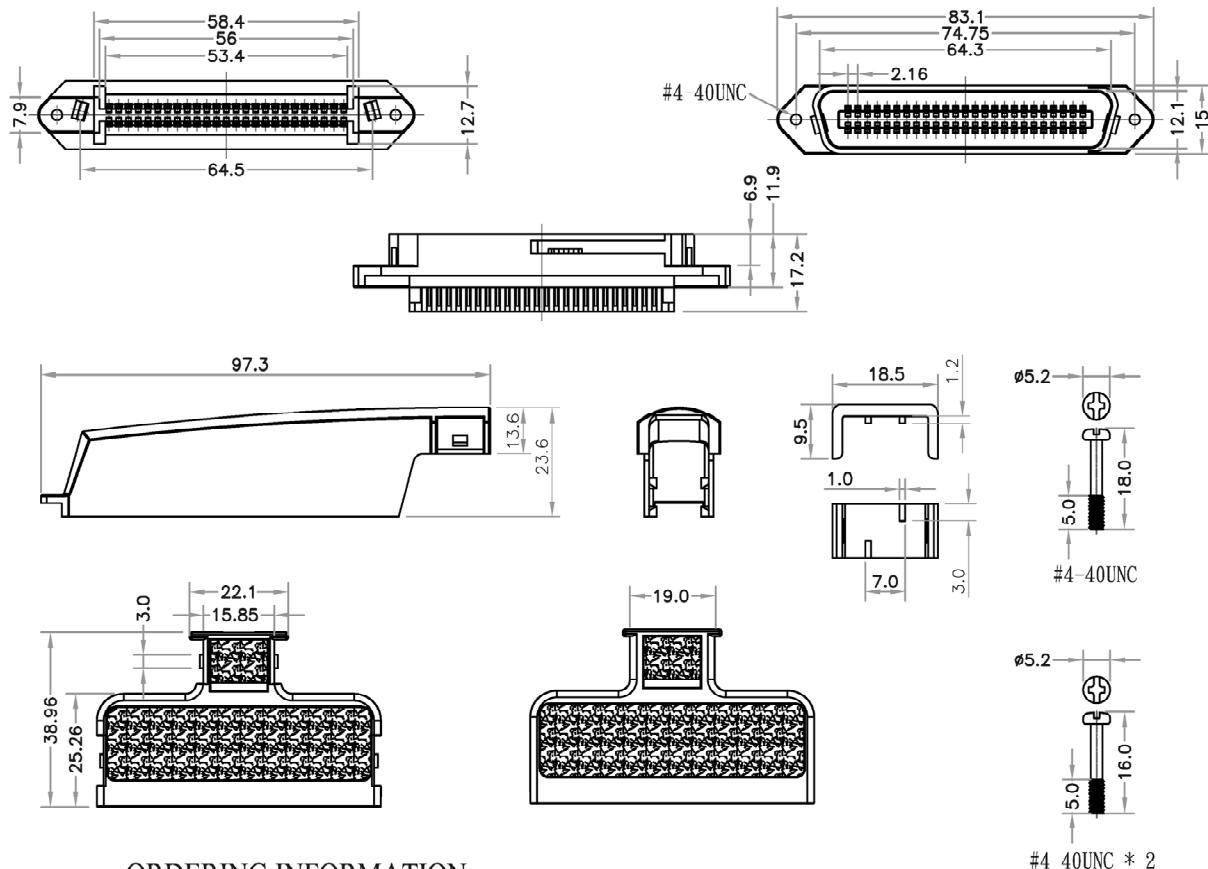

ORDERING INFORMATION

RCA - 50 P G X X X X 0

TYPE
RCA: 57 SOLDER TYPE
ALL PLASTIC

No. OF CONTACTS
50

CONTACT TYPE
P: PLUG

INSULATOR COLOR
G: GRAY

SPECIAL FUNCTION
A: W/H PLUG DUST COVER

SPECIAL FUNCTION
0: W/O SCREW
A: W/H 4*16 SCREW
B: W/H 4*14 SCREW

SHELL
A: RIGHT ANGLE
B: STRAIGHT

CONTACT PLATING
A: GOLD FLASH
D: 10μ"


CENTRONIC 2.16mm SOLDER FEMALE ALL PLASTIC



Material & finish

SHELL:
Steel
Nickel plated steel
PIN CONTACT:
Phosphor bronze
Gold plated
INSULATOR:
PBT & Glass-fibre
reinforced UL 94-V0

CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

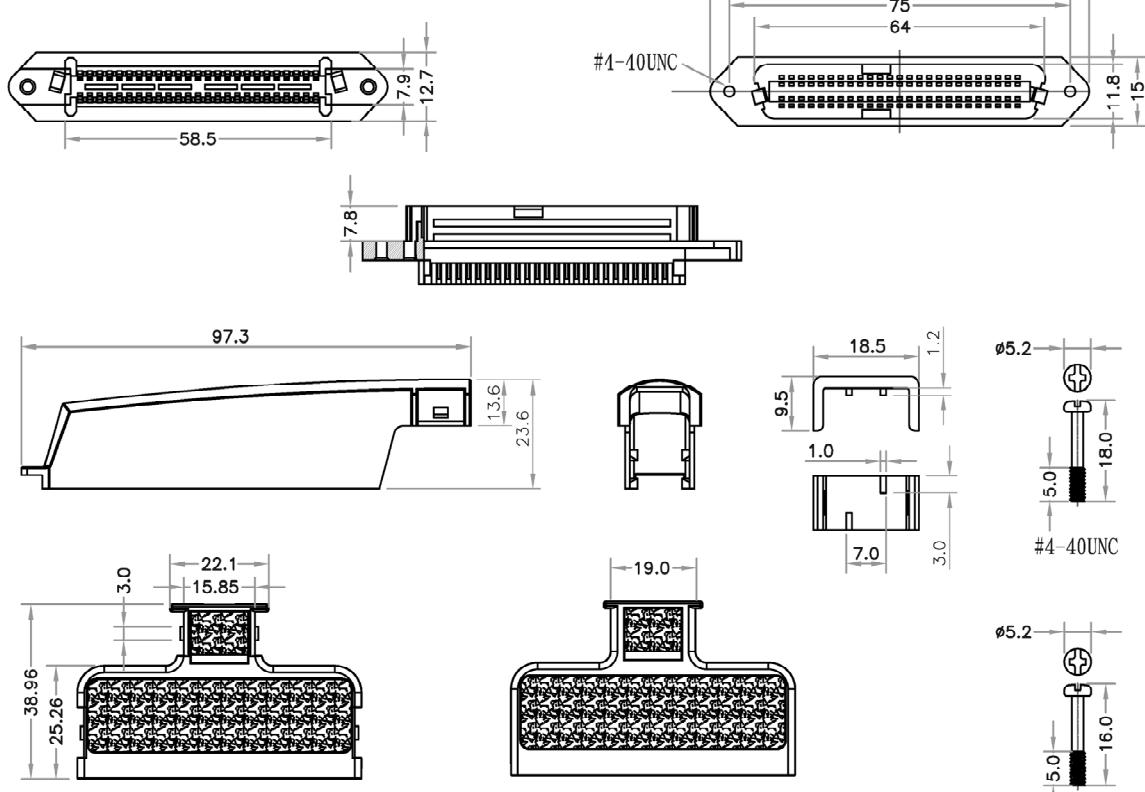

ORDERING INFORMATION

RCA - 50 S G X X X X 0

TYPE
RCA: 57 SOLDER TYPE
ALL PLASTIC

No. OF CONTACTS
50

CONTACT TYPE
S: SOCKET

INSULATOR COLOR
G: GRAY

SPECIAL FUNCTION
B: W/H SOCKET DUST COVER

SPECIAL FUNCTION
0: W/O SCREW
A: W/H 4*16 SCREW
B: W/H 4*14 SCREW

SHELL
A: RIGHT ANGLE
B: STRAIGHT

CONTACT PLATING
A: GOLD FLASH
D: 10μ"