

HALF PITCH D-SUB DIP RIGHT ANGLE

Order Information

MD5 - 50 S 0 A A M

No. OF CONTACTS
14,20,26,36,50,68

CONTACT TYPE
S:SOCKET

0:NONE

PLATING
A:SELECTIVE GOLD
E:15u" F:30u"

SHELL
A:NICKEL PLATED

THREAD HOLES FUNCTION

A:#2-56,BOARDLOCK,WITHOUT LATCH
C:M2.6*0.45,BOARDLOCK,WITHOUT LATCH
L:M2.6*0.45,BOARDLOCK,WITH LATCH
M:#2-56,BOARDLOCK,WITH LATCH

Material & finish

SHELL:

Steel
Nickel plated

PIN CONTACT:

Phosphor bronze
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

CURRENT RATING:

1 Amp

DIELECTRIC STRENGTH:

500V for one minute

INSULATOR RESISTANCE:





500MΩ Min. (at 500V DC)

CONTACT RESISTANCE :


35mΩ Max.

TEMPERATURE:

-55° C to +105° C

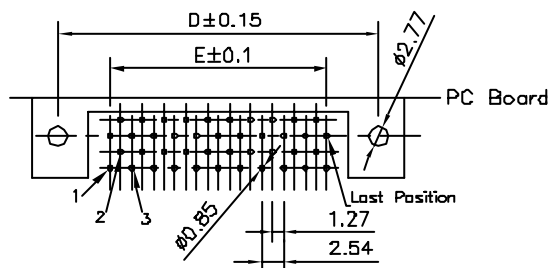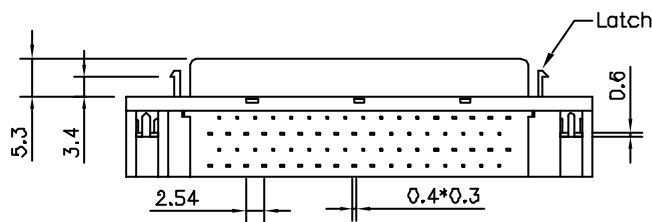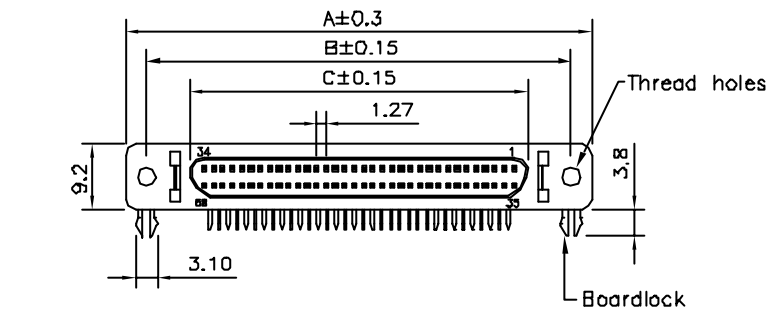

26P, 50P P.C.B. LAYOUT

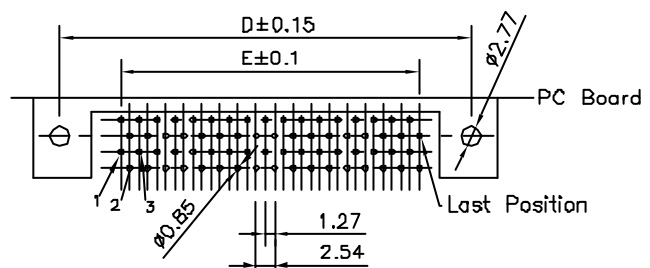

68P P.C.B. LAYOUT

POSITION	A	B	C	D	E
26	37.19	31.26	19.45	31.26	15.24
50	52.43	46.50	34.70	46.50	30.48
68	63.86	57.93	46.13	57.93	41.91