




REV	DATE	DESCRIPTION
A	11/22/'00	

FEATURE & MATERIAL

Plastic hood with spring latches
 Steel inner shell
 Full EMI/RFI shielded
 Housing & Cover: Plastic thermoplastic
 P.B.T UL 94V-0 black
 Contacts: Phosphor bronze
 Gold selective plated
 Shell: Steel nickel plated over copper
 Current rating: 1 Amp
 Insulator resistance: 500 Mohm/Min
 Withstanding voltage: 500V AC/Min
 Contact resistance: 35mohm Max
 Temperature range: -55°C ~+105°C

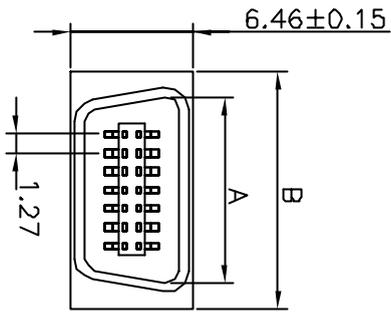

	A	B
14	12.80	16.45
20	16.50	20.00
26	20.40	24.00
36	26.70	30.40

UNIT : mm

FU-YAO TECHNOLOGY CO., LTD.
 復堯科技股份有限公司

MODEL NAME:
 HALF PITCH CENTRONIC
 MALE SOLDER TYPE

SELECT	1	2	3	EXTRA	PART NO.	MC1	-	XXPXAAO	FILE NO.	FIG00840
DIM-TOL	0.000	0.05	0.05	0.10						
	0.00	0.10	0.15	0.20						
	0.0	0.15	0.25	0.30						
ANGLE	1.0°	3.0°	5.0°							
					APPROVED BY:				SCALE:	FREE
					CHECKED BY:				DATE :	891122
					DRAW BY:					