


D-SUB CRIMP TYPE TERMINAL

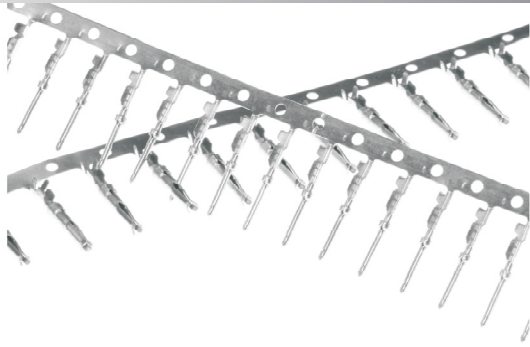

Material & finish

SHELL:
Steel
Nickel plated steel

PIN CONTACT:
Phosphor bronze
Gold plated

INSULATOR:
PBT & Glass-fibre reinforced UL 94-V0


CURRENT RATING:
5 Amp

DIELECTRIC STRENGTH:
1000V for one minute

INSULATOR RESISTANCE:
1000MΩ Min.(at 500V DC)

TEMPERATURE:
-55°C to +105°C

D-SUB

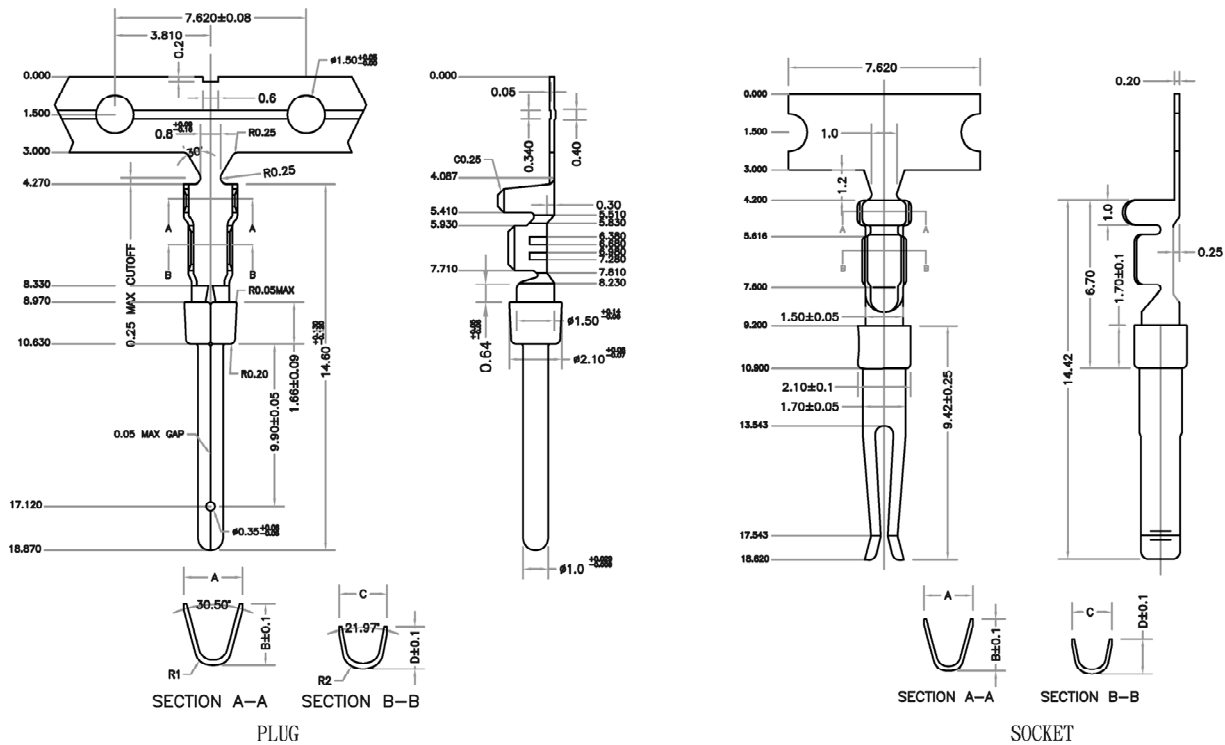

MALE			
DIMENSION	AWG	#20-22	#24-26
A		2.640	2.140
B		2.700	2.260
C		1.860	1.750
D		2.130	1.540
R1		R0.90	R0.75
R2		R0.75	R0.75

FEMALE			
DIMENSION	AWG	#20-22	#28-30
A		2.200	1.900
B		2.700	2.260
C		2.00	1.670
D		2.130	1.480

ORDERING INFORMATION

DT - X X X X 0 0

TYPE
DT: D-SUB CRIMP TERMINAL

CONTACT TYPE
P: PLUG
S: SOCKET

CONTACT PLATING
A: SELECTIVE GOLD
B: GOLD FLASH

PACKAGE TYPE
A: STANDARD (10K/REEL)
B: 100PCS/BAG

SPECIAL FUNCTION
A: #20-22
B: #24-26 (STANDARD)
C: #28-30